

## Ceiling light 3224 black square GU10 IP20

**Product code 14895**

Socket GU10  
Protection class IP20  
Height 110.0mm  
Width 85.0mm  
Length 85.0mm  
Casing colour black  
Polishing matt  
Shape square  
Work environment indoor use

Modern black LED ceiling light. Its minimalist design blends perfectly into various interiors, whether at home, in the office, or in a business environment. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!



## Ceiling light Art of Light NAOS white 230V 35W GU10

**Product code 14744**

Brand Art of Light  
Supply voltage 230V  
Output 35W  
Socket GU10  
Height 135.0mm  
Width 90.0mm  
Length 90.0mm  
Casing colour white  
Casing material gypsum  
Polishing matt  
Work environment indoor use  
Certificates CE


Gypsum frame.



## Ceiling light Cube 40x40 white 230V 5W 450lm CRI92 36° IP20

**Product code 18079**

Supply voltage 230V  
 Output 5W  
 Luminous flux 450lumens  
 Luminaire's efficiency lm79 90W  
 Lens angle 36  
 Cri 92  
 Protection class IP20  
 Lifespan 40000h  
 Height 70.0mm  
 Width 40.0mm  
 Length 40.0mm  
 Casing colour white  
 Casing material aluminum  
 Warranty 3 years

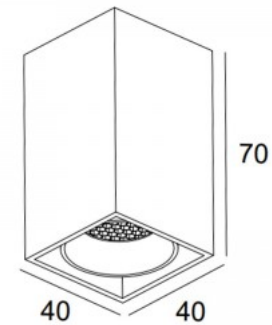

## Ceiling light E6 172x172 white square 230V 16W 1130lm 160° IP20 830

**Product code 14145**

Supply voltage 230V  
 Output 16W  
 Rated current 125mA  
 Luminous flux 1130lumens  
 Luminaire's efficiency lm79 71W  
 Correlated colour temperature warm white 3000K  
 Lens angle 160  
 Cri 80  
 Protection class IP20  
 Lifespan 20000h  
 Height 34.5mm  
 Width 172.0mm  
 Length 172.0mm  
 In package 1pc  
 In box 20pcs  
 Casing colour white  
 Casing material aluminum + plastic  
 Polishing matt  
 Shape square  
 No. of switches 12500pcs  
 Work environment indoor use  
 Operation temperature -20~+40°C  
 Certificates CE, RoHS



Surface-mounted square [ceiling light](#).  
 The LED light fixture fits into any interior with its minimalist design and can be installed on both walls and ceilings. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

## Ceiling light E6 D176 white round 230V 12W 1190lm 160° 830

### Product code 13524

Supply voltage 230V  
Output 12W  
Rated current 100mA  
Luminous flux 1190lumens  
Luminaire's efficiency lm79 99W  
Correlated colour temperature warm  
white 3000K  
Lens angle 160  
Cri 80  
Lifespan 20000h  
Height 34.5mm  
Diameter 176.5mm  
Weight 476g  
In package 1pc  
In box 20pcs  
Casing colour white  
Casing material aluminum + plastic  
Shape round  
No. of switches 12500pcs  
Operation temperature -20°C~40°C



Surface-mounted [ceiling light](#). The LED light fixture fits into any interior with its minimalist design and can be installed on both walls and ceilings. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)

## Ceiling light EMOS NEXXO 120x120 white square 230V 7.6W 680lm 120° IP40/20 840

## Product code 17949

---

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.90

Output 7.6W

Rated current 500mA

Luminous flux 680lumens

Luminaire's efficiency lm79 89W

Correlated colour temperature pure white 4000K

Lens angle 120

Cri 80

Protection class IP40/20

Lifespan 30000h

Height 40.0mm

Width 120.0mm

Length 120.0mm

Weight 427g

In package 1pc

In box 8pcs

Casing colour white

Casing material metal + plastic

Polishing matt

Shape square

Power supply [LIFUD](#)

Work environment indoor use

Certificates CE, RoHS

Warranty 3 years



Surface-mounted square LED ceiling light. Suitable for illuminating various indoor spaces. The LED lamp features a matte white housing. Can be mounted on the wall or ceiling. Possible light temperatures are warm white 3000K/3500K and daylight 4000K. From LED House selection, you can also find other [EMOS NEXXO ceiling lights](#)!

## Ceiling light EMOS NEXXO 170x170 white square 230V 12.5W 1100lm CRI80 120° IP40/20 3000K, 3500K, 4000K WW/WW/NW

**Product code 16633**

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.50

Output 12.5W

Rated current 300mA

Luminous flux 1100lumens

Luminaire's efficiency lm79 88W

Correlated colour temperature

WW/WW/NW 3000K, 3500K, 4000K

Lens angle 120

Cri 80

Protection class IP40/20

Lifespan 30000h

Height 42.0mm

Width 170.0mm

Length 170.0mm

In package 1pc

In box 8pcs

Casing colour white

Casing material metal + plastic

Polishing matt

Shape square

Power supply [LIFUD](#)

Work environment indoor use

Certificates CE, RoHS

Warranty 3 years



Surface-mounted square LED ceiling light. Suitable for illuminating various indoor spaces. The LED lamp features a matte white housing. Can be mounted on the wall or ceiling.

Possible light temperatures are warm white 3000K/3500K and daylight 4000K. From LED House selection, you can also find other [EMOS NEXXO ceiling lights!](#)

## Ceiling light EMOS NEXXO 225x225 white square 230V 21W 1900lm CRI80 120° IP40/20 3000K, 3500K, 4000K WW/WW/NW

**Product code 16888**

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.90

Output 21W

Rated current 500mA

Luminous flux 1900lumens

Luminaire's efficiency lm79 90W

Correlated colour temperature

WW/WW/NW 3000K, 3500K, 4000K

Lens angle 120

Cri 80

Protection class IP40/20

Lifespan 30000h

Height 42.0mm

Width 225.0mm

Length 225.0mm

In package 1pc

In box 8pcs

Casing colour white

Casing material metal + plastic

Polishing matt

Shape square

Power supply [LIFUD](#)

Work environment indoor use

Certificates CE, RoHS

Warranty 3 years



Surface-mounted square LED ceiling light. Suitable for illuminating various indoor spaces. The LED lamp features a matte white housing. Can be mounted on the wall or ceiling.

Possible light temperatures are warm white 3000K/3500K and daylight 4000K. From LED House selection, you can also find other [EMOS NEXXO ceiling lights!](#)

## Ceiling light EMOS NEXXO D120 white round 230V 7.6W 680lm CRI80 120° IP40/20 3000K, 3500K, 4000K WW/WW/NW

**Product code 17047**

Brand [EMOS](#)  
 Supply voltage 230V  
 Power factor 0.50  
 Output 7.6W  
 Rated current 300mA  
 Luminous flux 680lumens  
 Luminaire's efficiency lm79 89W  
 Correlated colour temperature  
 WW/WW/NW 3000K, 3500K, 4000K  
 Lens angle 120  
 Cri 80  
 Protection class IP40/20  
 Lifespan 30000h  
 Height 40.0mm  
 Diameter 120.0mm  
 In package 1pc  
 In box 8pcs  
 Casing colour white  
 Casing material metal + plastic  
 Polishing matt  
 Shape round  
 Power supply [LIFUD](#)  
 Work environment indoor use  
 Certificates CE, RoHS  
 Warranty 3 years



Surface-mounted circular ceiling light. Its minimalist design blends perfectly with various interiors, whether at home, in the office, or in a business environment. The light fixture is suitable for indoor use only! You can choose between different light temperatures: Warm white 3000K/3500K Daylight white 4000K Enhance the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

## Ceiling light EMOS NEXXO D170 white round 230V 12.5W 1100lm CRI80 120° IP40/20 3000K, 3500K, 4000K WW/WW/NW

**Product code 16890**

Brand [EMOS](#)  
Supply voltage 230V  
Power factor 0.50  
Output 12.5W  
Rated current 300mA  
Luminous flux 1100lumens  
Luminaire's efficiency lm79 88W  
Correlated colour temperature  
WW/WW/NW 3000K, 3500K, 4000K  
Lens angle 120  
Cri 80  
Protection class IP40/20  
Lifespan 30000h  
Height 42.0mm  
Diameter 170.0mm  
In package 1pc  
In box 8pcs  
Casing colour white  
Casing material metal + plastic  
Polishing matt  
Shape round  
Power supply [LIFUD](#)  
Work environment indoor use  
Certificates CE, RoHS  
Warranty 3 years



Surface-mounted circular ceiling light. Its minimalist design blends perfectly with various interiors, whether at home, in the office, or in a business environment. The light fixture is suitable for indoor use only! You can choose between different light temperatures: Warm white 3000K/3500K Daylight white 4000K Enhance the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!



## Ceiling light EMOS NEXXO D225 white round 230V 21W 1900lm CRI80 120° IP40/20 3000K, 3500K, 4000K WW/WW/NW

**Product code 16889**

Brand [EMOS](#)  
 Supply voltage 230V  
 Power factor 0.90  
 Output 21W  
 Rated current 500mA  
 Luminous flux 1900lumens  
 Luminaire's efficiency lm79 90W  
 Correlated colour temperature  
 WW/WW/NW 3000K, 3500K, 4000K  
 Lens angle 120  
 Cri 80  
 Protection class IP40/20  
 Lifespan 30000h  
 Height 42.0mm  
 Diameter 225.0mm  
 In package 1pc  
 In box 8pcs  
 Casing colour white  
 Casing material metal + plastic  
 Polishing matt  
 Shape round  
 Power supply [LIFUD](#)  
 Work environment indoor use  
 Certificates CE, RoHS  
 Warranty 3 years



Surface-mounted circular ceiling light. Its minimalist design blends perfectly with various interiors, whether at home, in the office, or in a business environment. The light fixture is suitable for indoor use only! You can choose between different light temperatures: Warm white 3000K/3500K Daylight white 4000K Enhance the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

## Ceiling light EMOS NEXXO D300 white round 230V 25W 2100lm 110° IP40/20 830

**Product code 18008**

Brand [EMOS](#)

Supply voltage 230V

Output 25W

Rated current 300mA

Luminous flux 2100lumens

Luminaire's efficiency lm79 84W

Correlated colour temperature warm white 3000K

Lens angle 110

Cri 82

Protection class IP40/20

Lifespan 30000h

Height 21.0mm

Diameter 300.0mm

Installation opening diameter 280mm

In package 1pc

In box 8pcs

Casing colour white

Casing material metal + plastic

Polishing matt

Shape round

Power supply [LIFUD](#)

Work environment indoor use

Certificates CE, RoHS

Warranty 3 years



The EMOS NEXXO LED circular panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The panel's light temperature is adjustable, ranging from warm light to daylight. Improve the quality of light in your everyday life and choose a top-quality lighting solution from the [LED house product range!](#)

## Ceiling light EMOS NEXXO D300 white round 230V 25W 2100lm 110° IP40/20 840

**Product code 17963**

Brand [EMOS](#)

Supply voltage 230V

Output 25W

Rated current 300mA

Luminous flux 2100lumens

Luminaire's efficiency lm79 84W

Correlated colour temperature pure white 4000K

Lens angle 110

Cri 82

Protection class IP40/20

Lifespan 30000h

Height 21.0mm

Diameter 300.0mm

Installation opening diameter 280mm

In package 1pc

In box 8pcs

Casing colour white

Casing material metal + plastic

Polishing matt

Shape round

Power supply [LIFUD](#)

Work environment indoor use

Certificates CE, RoHS

Warranty 3 years



The EMOS NEXXO LED circular panel is a stylish and functional lighting solution that fits perfectly into various indoor spaces, including homes, offices, and public areas. The panel's light temperature is adjustable, ranging from warm light to daylight. Improve the quality of light in your everyday life and choose a top-quality lighting solution from the [LED house product range!](#)

## Ceiling light EMOS NEXXO D300 white round 230V 28.5W 2700lm CRI80 120° IP40/20 3000K, 3500K, 4000K WW/WW/NW

**Product code 17048**

Brand [EMOS](#)

Supply voltage 230V

Power factor 0.90

Output 28.5W

Rated current 700mA

Luminous flux 2700lumens

Luminaire's efficiency lm79 95W

Correlated colour temperature  
WW/WW/NW 3000K, 3500K, 4000K

Lens angle 120

Cri 80

Protection class IP40/20

Lifespan 30000h

Height 42.0mm

Diameter 300.0mm

In package 1pc

In box 8pcs

Casing colour white

Casing material metal + plastic

Polishing matt

Shape round

Power supply [LIFUD](#)

Work environment indoor use

Certificates CE, RoHS

Warranty 3 years



Surface-mounted circular ceiling light. Its minimalist design blends perfectly with various interiors, whether at home, in the office, or in a business environment. The light fixture is suitable for indoor use only! You can choose between different light temperatures: Warm white 3000K/3500K Daylight white 4000K Enhance the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

## Ceiling light GLOBE ELEGANCE SMOKE S6 E27 IP20

### Product code 18064

Socket E27  
Protection class IP20  
Work environment indoor use



kobi

## Ceiling light GTV ORIS PLUS white round 230V 13W 1020lm 120° IP44 830

### Product code 18039


Brand [GTV](#)  
Supply voltage 230V  
Power factor 0.50  
Output 13W  
Luminous flux 1020lumens  
Luminaire's efficiency lm79 78W  
Correlated colour temperature warm  
white 3000K  
Lens angle 120  
Cri 80  
Protection class IP44  
Lifespan 40000h  
Height 22.0mm  
Diameter 168.0mm  
Installation opening diameter 155mm  
Weight 350g  
Casing colour white  
Casing material aluminum  
Polishing matt  
Shape round  
No. of switches 20000pcs  
Impact resistance IK09  
Work environment indoor use  
Warranty 3 years



## LED downlight LAHTI MINI 2X9W black 230V 18W 1050lm 35° IP20 TRIAC 930

**Product code 16426 TRIAC dimmable**

Supply voltage 230V  
 Dimmable TRIAC  
 Output 18W  
 Luminous flux 1050lumens  
 Luminaire's efficiency lm79 58W  
 Correlated colour temperature warm white 3000K  
 Lens angle 35  
 Source of light [PHILIPS LED](#)  
 Cri 90  
 Protection class IP20  
 Lifespan 30000h  
 Height 82.0mm  
 Width 78.0mm  
 Length 161.0mm  
 Weight 820g  
 In box 12pcs  
 Casing colour black  
 Casing material aluminum  
 Work environment indoor use  
 Certificates CE, RoHS  
 Warranty 2 years

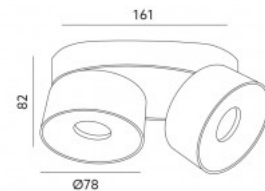


LAHTI MINI surface-mounted LED luminaire. Modern and elegant, offering minimalist design that fits various interiors. This luminaire, with IP20 protection rating, is an ideal choice for home or office environments, providing warm white light at 3000K. With this LED lamp, you can keep colors true to life in living spaces, making it suitable as the main light source in a room! The lamp body is made of aluminum, in a matte black finish. The 18W LAHTI MINI is also dimmable (TRIAC). With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Elevate the quality of your everyday lighting and choose a top-notch lighting solution from the LED house product range!

## LED downlight LAHTI MINI 2X9W white 230V 18W 1050lm 35° IP20 TRIAC 930

**Product code 16427 TRIAC dimmable**

Supply voltage 230V  
 Dimmable TRIAC  
 Output 18W  
 Luminous flux 1050lumens  
 Luminaire's efficiency lm79 58W  
 Correlated colour temperature warm  
 white 3000K  
 Lens angle 35  
 Source of light [PHILIPS LED](#)  
 Cri 90  
 Protection class IP20  
 Lifespan 30000h  
 Height 82.0mm  
 Width 78.0mm  
 Length 161.0mm  
 Weight 820g  
 In box 12pcs  
 Casing colour white  
 Casing material aluminum  
 Work environment indoor use  
 Certificates CE, RoHS  
 Warranty 2 years

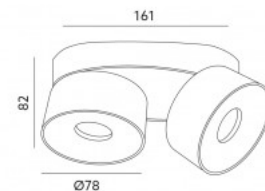

LAHTI MINI surface-mounted LED luminaire. Modern and elegant, offering minimalist design that fits various interiors. This luminaire, with IP20 protection rating, is an ideal choice for home or office environments, providing warm white light at 3000K. With this LED lamp, you can keep colors true to life in living spaces, making it suitable as the main light source in a room! The lamp body is made of aluminum, in a matte black finish. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Elevate the quality of your everyday lighting and choose a top-notch lighting solution from the LED house product range!

## LED downlight LAHTI MINI black 230V 13.5W 850lm 35° IP20 TRIAC 930

**Product code 16605 TRIAC dimmable**

Supply voltage 230V  
 Dimmable TRIAC  
 Output 13.5W  
 Luminous flux 850lumens  
 Luminaire's efficiency lm79 63W  
 Correlated colour temperature warm white 3000K  
 Lens angle 35  
 Source of light [PHILIPS LED](#)  
 Cri 90  
 Protection class IP20  
 Lifespan 30000h  
 Height 99.0mm  
 Diameter 100.0mm  
 Weight 580g  
 In package 1pc  
 In box 24pcs  
 Casing colour black  
 Casing material aluminum  
 Work environment indoor use  
 Certificates CE, RoHS  
 Warranty 2 years



Modern black LED ceiling light. Its minimalist design blends perfectly into various interiors, whether at home, in the office, or in a business environment. This ceiling light with IP20 protection class is an ideal choice for home or office environments, providing warm white light at a temperature of 3000K. Thanks to CRI90, the LED light is capable of rendering colors naturally, contributing to the overall atmosphere and feeling of the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!



# LED downlight LAHTI MINI black 230V 9W 550lm 35° IP20 TRIAC 930

**Product code 16599 TRIAC dimmable**

Supply voltage 230V  
 Dimmable TRIAC  
 Output 9W  
 Luminous flux 550lumens  
 Luminaire's efficiency lm79 61W  
 Correlated colour temperature warm white 3000K  
 Lens angle 35  
 Cri 90  
 Protection class IP20  
 Lifespan 30000h  
 Height 80.0mm  
 Diameter 78.0mm  
 Weight 450g  
 Package weight 500g  
 In package 1pc  
 In box 24pcs  
 Casing colour black  
 Casing material aluminum  
 Work environment indoor use  
 Certificates CE, RoHS  
 Warranty 2 years



Modern black LED ceiling light. Its minimalist design blends perfectly into various interiors, whether at home, in the office, or in a business environment. This ceiling light with IP20 protection class is an ideal choice for home or office environments, providing warm white light at a temperature of 3000K. Thanks to CRI90, the LED light is capable of rendering colors naturally, contributing to the overall atmosphere and feeling of the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

## LED downlight LAHTI MINI white 230V 10.5W 680lm 35° IP20 TRIAC 930

**Product code 17046 TRIAC dimmable**

Supply voltage 230V  
Dimmable TRIAC  
Output 10.5W  
Luminous flux 680lumens  
Luminaire's efficiency lm79 65W  
Correlated colour temperature warm white 3000K  
Lens angle 35  
Source of light [PHILIPS LED](#)  
Cri 90  
Protection class IP20  
Lifespan 30000h  
Height 99.0mm  
Diameter 100.0mm  
Weight 780g  
In box 24pcs  
Casing colour white  
Casing material aluminum  
No. of switches 20000pcs  
Work environment indoor use  
Certificates CE, RoHS  
Warranty 2 years



Modern black LED ceiling light. Its minimalist design blends perfectly into various interiors, whether at home, in the office, or in a business environment. This ceiling light with IP20 protection class is an ideal choice for home or office environments, providing warm white light at a temperature of 3000K. Thanks to CRI90, the LED light is capable of rendering colors naturally, contributing to the overall atmosphere and feeling of the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

## LED downlight LAHTI MINI white 230V 13.5W 850lm 35° IP20 TRIAC 930

**Product code 16606 TRIAC dimmable**

Supply voltage 230V  
Dimmable TRIAC  
Output 13.5W  
Luminous flux 850lumens  
Luminaire's efficiency lm79 63W  
Correlated colour temperature warm  
white 3000K  
Lens angle 35  
Source of light [PHILIPS LED](#)  
Cri 90  
Protection class IP20  
Lifespan 30000h  
Height 99.0mm  
Diameter 100.0mm  
Weight 580g  
In box 24pcs  
Casing colour white  
Casing material aluminum  
Work environment indoor use  
Certificates CE, RoHS  
Warranty 2 years



Modern black LED ceiling light. Its minimalist design blends perfectly into various interiors, whether at home, in the office, or in a business environment. This ceiling light with IP20 protection class is an ideal choice for home or office environments, providing warm white light at a temperature of 3000K. Thanks to CRI90, the LED light is capable of rendering colors naturally, contributing to the overall atmosphere and feeling of the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

## LED downlight LAHTI MINI white 230V 9W 550lm 35° IP20 TRIAC 930

**Product code 16411 TRIAC dimmable**

Supply voltage 230V  
Dimmable TRIAC  
Output 9W  
Luminous flux 550lumens  
Luminaire's efficiency lm79 61W  
Correlated colour temperature warm  
white 3000K  
Lens angle 35  
Source of light [PHILIPS LED](#)  
Cri 90  
Protection class IP20  
Lifespan 30000h  
Height 80.0mm  
Diameter 78.0mm  
Weight 410g  
In box 24pcs  
Casing colour white  
Casing material aluminum  
Work environment indoor use  
Certificates CE, RoHS  
Warranty 2 years



Modern black LED ceiling light. Its minimalist design blends perfectly into various interiors, whether at home, in the office, or in a business environment. This ceiling light with IP20 protection class is an ideal choice for home or office environments, providing warm white light at a temperature of 3000K. Thanks to CRI90, the LED light is capable of rendering colors naturally, contributing to the overall atmosphere and feeling of the room. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

## Ceiling light LENO black GU10 IP20

**Product code 17151**

Socket GU10  
Protection class IP20  
Height 123.0mm  
Length 175.0mm  
In box 10pcs  
Casing colour black  
Casing material aluminum  
Polishing matt  
Work environment indoor use

Striking surface-mounted [ceiling light](#). Suitable for illuminating various indoor spaces. LED bulb is not included in the package! Can be installed on both walls and ceilings. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)



## Ceiling light LENO white GU10 IP20

**Product code 17150**

Socket GU10  
Protection class IP20  
Height 123.0mm  
Length 175.0mm  
In box 10pcs  
Casing colour white  
Casing material aluminum  
Polishing matt  
Work environment indoor use


Striking surface-mounted [ceiling light](#). Suitable for illuminating various indoor spaces. LED bulb is not included in the package! Can be installed on both walls and ceilings. Illuminate your world with LED House professionals - [check out our project portfolio here!](#)



## Luminaire NUUK black 230V GU10 IP20

### Product code 18034


Supply voltage 230V  
Maximum output 35W/1m  
Socket GU10  
Protection class IP20  
In box 20pcs  
Casing colour black  
Casing material aluminum  
Work environment indoor use

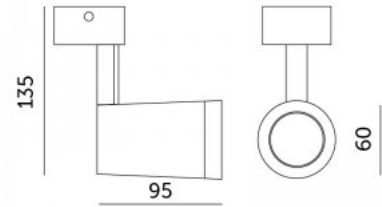

## Luminaire NUUK white 230V GU10 IP20

### Product code 18033

Supply voltage 230V  
Maximum output 35W/1m  
Socket GU10  
Protection class IP20  
In box 20pcs  
Casing colour white  
Casing material aluminum  
Work environment indoor use

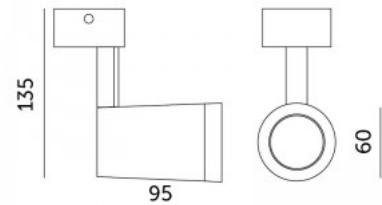

## LED downlight PROLUMEN DL115A black 18W 1890lm 90° IP54 940

## Product code 15519

---

Brand [PROLUMEN](#)

Output 18W

Luminous flux 1890lumens

Luminaire's efficiency lm79 105W

Correlated colour temperature pure white 4000K

Lens angle 90

Cri 90

Protection class IP54

Lifespan 50000h

Height 124.0mm

Diameter 170.0mm

In box 12pcs

Casing colour black

Casing material aluminum

Polishing matt

Impact resistance IK05

Work environment indoor use

Certificates CE

Warranty 5 years



Round-shaped surface-mounted LED ceiling light. Suitable for various spaces due to its simple design. This light fixture is intended for indoor use only, with an IP54 protection rating. It has an ideal color rendering index (CRI90) for workspaces and offices. LED lights with a color temperature of 4000K create neutral light, which is ideal for workspaces and kitchens, among other places. Enhance the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

## LED downlight PROLUMEN DL115A white round 230V 25W 2330lm 60° IP54 930

Product code 15892

Brand [PROLUMEN](#)

Supply voltage 230V

Output 25W

Luminous flux 2330lumens

Luminaire's efficiency lm79 93W

Correlated colour temperature warm  
white 3000K

Lens angle 60

Cri 90

Protection class IP54

Lifespan 50000h

Height 129.0mm

Diameter 213.0mm

Weight 800g

Package weight 12500g

In box 12pcs

Casing colour white

Casing material aluminum

Shape round

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years



Surface-mounted LED ceiling light with a round shape. The IP54 protection class means that this luminaire is protected against ordinary dust and splashes from any direction. This luminaire has an ideal color rendering index (CRI90) for workspaces and offices. The warm light of the luminaire is perfect for bedrooms, living rooms, and other spaces with a softer atmosphere. The same model of recessed luminaire can also be found in the LED house product range with a [black-colored housing!](#)

## LED luminaire PROLUMEN DL115B white round 230V 25W 2330lm 90° IP54 TRIAC 930



**Product code 15873 TRIAC dimmable**

---

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable TRIAC

Output 25W

Luminous flux 2330lumens

Luminaire's efficiency lm79 93W

Correlated colour temperature warm white 3000K

Lens angle 90

Cri 90

Protection class IP54

Lifespan 50000h

Height 129.0mm

Diameter 213.0mm

Weight 800g

Package weight 12500g

In box 12pcs

Casing colour white

Casing material aluminum

Shape round

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years



Surface-mounted LED ceiling light with a round shape. The IP54 protection class means that this luminaire is protected against ordinary dust and splashes from any direction. This luminaire has an ideal color rendering index (CRI90) for workspaces and offices. This luminaire is available in both warm white (3000K) and daylight (4000K) options. For homes, we recommend warm white lights for bedrooms, living rooms, and dining areas. Daylight white may be best suited for kitchens and offices! With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). From the LED house product range, you can find several other [ceiling lights](#) that complement this luminaire to create unique lighting effects in your space!

## LED luminaire PROLUMEN DL115B white round 230V 25W 2400lm 90° IP54 940

**Product code 15872**

Brand [PROLUMEN](#)

Supply voltage 230V

Output 25W

Luminous flux 2400lumens

Luminaire's efficiency lm79 96W

Correlated colour temperature pure white 4000K

Lens angle 90

Cri 90

Protection class IP54

Lifespan 50000h

Height 129.0mm

Diameter 213.0mm

Weight 800g

Package weight 12500g

In box 12pcs

Casing colour white

Casing material aluminum

Shape round

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years



Surface-mounted LED ceiling light with a round shape. The IP54 protection class means that this luminaire is protected against ordinary dust and splashes from any direction. This luminaire has an ideal color rendering index (CRI90) for workspaces and offices. This luminaire is available in both warm white (3000K) and daylight (4000K) options. For homes, we recommend warm white lights for bedrooms, living rooms, and dining areas. Daylight white may be best suited for kitchens and offices! With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). From the LED house product range, you can find several other [ceiling lights](#) that complement this luminaire to create unique lighting effects in your space!

## Ceiling light PROLUMEN DL126 white 230V 10W 850lm CRI80 36° IP20 TRIAC 3000K, 4000K, 5000K WW/DW/CW

**Product code 18042 TRIAC dimmable**

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 10W

Luminous flux 850lumens

Luminaire's efficiency lm79 85W

Correlated colour temperature

WW/DW/CW 3000K, 4000K, 5000K

Lens angle 36

Cri 80

Sdcm - macadam ellipses 5

Protection class IP20

Lifespan 50000h

Llmf tm21 L80B10 @25°C 50.000h

Height 248.0mm

Diameter 65.0mm

Casing colour white

Casing material aluminum

Impact resistance IK03

Work environment indoor use

Operation temperature -20° - + 40°C

Certificates CE, RoHS

Warranty 5 years



Looking to highlight the impressive features of your space even more? Choose a spot light for this purpose and illuminate every dark corner! This LED spotlight with adjustable light beam is a great tool to showcase wall-mounted artworks, vases on shelves, and even the nightstand next to the bed. LED lights have been widely used as focus lighting in shopping centers, display windows, museums, and homes! The direction of the light beam can be adjusted vertically up to 90 degrees and horizontally up to 330 degrees. The simple and unique design of the light fixture doesn't distract attention from the focal point, making it suitable for various interiors. This light fixture is intended for indoor use only.

## Ceiling light PROLUMEN DL129 black 230V 10W 1030lm 24° IP20 TRIAC 930

**Product code 15890 TRIAC dimmable**

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable TRIAC

Output 10W

Luminous flux 1030lumens

Luminaire's efficiency lm79 103W

Correlated colour temperature warm  
white 3000K

Lens angle 24

Source of light CITIZEN LED

Cri 90

Protection class IP20

Lifespan 50000h

Height 110.0mm

Width 90.0mm

Length 90.0mm

In box 24pcs

Casing colour black

Casing material aluminum

Work environment indoor use

Certificates CE, Rohs

Warranty 5 years

An elegant square-shaped indoor ceiling light with dimmable functionality. Suitable for hotels, residential spaces, offices, conference rooms, etc. This light fixture is often installed in stairwells, hallways, and reception areas. The direction of light is adjustable: 350 degrees horizontally, 25 degrees vertically. Can be mounted on various surfaces (ceiling, wall). With TRIAC technology, the LED light fixture can be easily adjusted for different lighting scenes, creating cozy light for intimate dinners or brighter light for working purposes. This light fixture is suitable for indoor use only, IP20 protection rating. Thanks to CRI90, the LED light fixture is capable of rendering colors naturally, contributing to the overall atmosphere and feel of the space. Enhance the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!



## Ceiling light PROLUMEN DL129 black 230V 10W 1030lm 36° IP20 TRIAC 940

**Product code 15888 TRIAC dimmable**

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable TRIAC

Output 10W

Luminous flux 1030lumens

Luminaire's efficiency lm79 103W

Correlated colour temperature pure white 4000K

Lens angle 36

Source of light CITIZEN LED

Cri 90

Protection class IP20

Lifespan 50000h

Height 110.0mm

Width 90.0mm

Length 90.0mm

In box 24pcs

Casing colour black

Casing material aluminum

Work environment indoor use

Certificates CE, Rohs

Warranty 5 years



An elegant square-shaped indoor ceiling light with dimmable functionality. Suitable for hotels, residential spaces, offices, conference rooms, etc. This light fixture is often installed in stairwells, hallways, and reception areas. The direction of light is adjustable: 350 degrees horizontally, 25 degrees vertically. Can be mounted on various surfaces (ceiling, wall). With TRIAC technology, the LED light fixture can be easily adjusted for different lighting scenes, creating cozy light for intimate dinners or brighter light for working purposes. This light fixture is suitable for indoor use only, IP20 protection rating. Thanks to CRI90, the LED light fixture is capable of rendering colors naturally, contributing to the overall atmosphere and feel of the space. Enhance the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

## Ceiling light PROLUMEN DL129 black 230V 10W 1030lm 60° IP20 TRIAC 930

**Product code 15102 TRIAC dimmable**

Brand [PROLUMEN](#)  
 Supply voltage 230V  
 Dimmable TRIAC  
 Output 10W  
 Luminous flux 1030lumens  
 Luminaire's efficiency lm79 103W  
 Correlated colour temperature warm white 3000K  
 Lens angle 60  
 Source of light CITIZEN LED  
 Cri 90  
 Protection class IP20  
 Lifespan 50000h  
 Height 110.0mm  
 Width 90.0mm  
 Length 90.0mm  
 In box 24pcs  
 Casing colour black  
 Casing material aluminum  
 Work environment indoor use  
 Certificates CE, Rohs  
 Warranty 5 years



An elegant square-shaped indoor ceiling light with dimmable functionality. Suitable for hotels, residential spaces, offices, conference rooms, etc. This light fixture is often installed in stairwells, hallways, and reception areas. The direction of light is adjustable: 350 degrees horizontally, 25 degrees vertically. Can be mounted on various surfaces (ceiling, wall). With TRIAC technology, the LED light fixture can be easily adjusted for different lighting scenes, creating cozy light for intimate dinners or brighter light for working purposes. This light fixture is suitable for indoor use only, IP20 protection rating. Thanks to CRI90, the LED light fixture is capable of rendering colors naturally, contributing to the overall atmosphere and feel of the space. Enhance the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

## Ceiling light PROLUMEN DL129 white 230V 20W 2000lm 36° IP20 TRIAC 840

**Product code 15891 TRIAC dimmable**

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable TRIAC

Output 20W

Luminous flux 2000lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature pure white 4000K

Lens angle 36

Source of light CITIZEN LED

Cri 80

Protection class IP20

Height 122.0mm

Width 115.0mm

Length 115.0mm

In box 18pcs

Casing colour white

Certificates CE, Rohs

Warranty 5 years



An elegant square-shaped indoor ceiling light with dimmable functionality. Suitable for hotels, residential spaces, offices, conference rooms, etc. This light fixture is often installed in stairwells, hallways, and reception areas. The direction of light is adjustable: 350 degrees horizontally, 25 degrees vertically. Can be mounted on various surfaces (ceiling, wall). With TRIAC technology, the LED light fixture can be easily adjusted for different lighting scenes, creating cozy light for intimate dinners or brighter light for working purposes. This light fixture is suitable for indoor use only, IP20 protection rating. Enhance the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

## LED downlight PROLUMEN DL176 white 15W 1500lm 36° IP54 DALI 930

**Product code 16994 DALI dimmable**

Brand [PROLUMEN](#)

Dimmable DALI

Output 15W

Luminous flux 1500lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature warm white 3000K

Lens angle 36

Cri 90

Protection class IP54

Lifespan 50000h

Height 133.8mm

Diameter 100.4mm

In package 1pc

Casing colour white

Casing material aluminum

Polishing matt

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



Surface-mounted LED ceiling light with a round shape. Suitable for various spaces due to its simple design. An environmentally friendly and stylish ceiling light that creates a cozy atmosphere with warm light in the room. The light fixture is designed for indoor use only, with a dust and water resistance rating of IP54. This light fixture has an ideal color rendering index (CRI90) for workspaces and offices. Integrated DALI Dim technology allows for adjusting the brightness of the light fixture according to needs. Enhance the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range



## LED downlight PROLUMEN DL176 white 25W 2300lm 36° IP54 DALI 930

**Product code 16233 DALI dimmable**

Brand [PROLUMEN](#)

Dimmable DALI

Output 25W

Luminous flux 2300lumens

Luminaire's efficiency lm79 92W

Correlated colour temperature warm white 3000K

Lens angle 36

Cri 90

Protection class IP54

Lifespan 50000h

Height 144.0mm

Diameter 120.0mm

Weight 960g

Package weight 1110g

In package 1pc

In box 12pcs

Casing colour white

Casing material aluminum

Polishing matt

Work environment indoor use

Certificates CE

Warranty 5 years



Surface-mounted LED ceiling light with a round shape. Suitable for various spaces due to its simple design. An environmentally friendly and stylish ceiling light that creates a cozy atmosphere with warm light in the room. The light fixture is designed for indoor use only, with a dust and water resistance rating of IP54. This light fixture has an ideal color rendering index (CRI90) for workspaces and offices. Integrated DALI Dim technology allows for adjusting the brightness of the light fixture according to needs. Enhance the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range

## Ceiling light PROLUMEN DL207 black 230V 15W 1300lm 36° IP20 TRIAC 830

**Product code 16507 TRIAC dimmable**

Brand [PROLUMEN](#)  
Supply voltage 230V  
Power factor 0.90  
Dimmable TRIAC  
Output 15W  
Luminous flux 1300lumens  
Luminaire's efficiency lm79 87W  
Correlated colour temperature warm  
white 3000K  
Lens angle 36  
Cri 80  
Sdcm - macadam ellipses 5  
Protection class IP20  
Lifespan 50000h  
Llmf tm21 L80B10 @25°C 50.000h  
Height 186.0mm  
Diameter 85.0mm  
Casing colour black  
Casing material aluminum  
Work environment indoor use  
Certificates CE, RoHS  
Warranty 5 years



Looking to highlight the impressive features of your space even more? Choose a spot light for this purpose and illuminate every dark corner! This LED spotlight with adjustable light beam is a great tool to showcase wall-mounted artworks, vases on shelves, and even the nightstand next to the bed. LED lights have been widely used as focus lighting in shopping centers, display windows, museums, and homes! The direction of the light beam can be adjusted vertically up to 90 degrees and horizontally up to 330 degrees. The simple and unique design of the light fixture doesn't distract attention from the focal point, making it suitable for various interiors. This light fixture is intended for indoor use only.

## Ceiling light PROLUMEN DL207 black 230V 15W 1400lm 36° IP20 940

**Product code 16867**

Brand [PROLUMEN](#)  
Supply voltage 230V  
Power factor 0.90  
Output 15W  
Luminous flux 1400lumens  
Luminaire's efficiency lm79 93W  
Correlated colour temperature pure white 4000K  
Lens angle 36  
Cri 90  
Sdcm - macadam ellipses 5  
Protection class IP20  
Lifespan 50000h  
Llmf tm21 L80B10 @25°C 50.000h  
Height 186.0mm  
Diameter 85.0mm  
Weight 750g  
Package weight 850g  
In package 1pc  
In box 12pcs  
Casing colour black  
Casing material aluminum  
Work environment indoor use  
Certificates CE, RoHS  
Warranty 5 years



Looking to highlight the impressive features of your space even more? Choose a spot light for this purpose and illuminate every dark corner! This LED spotlight with adjustable light beam is a great tool to showcase wall-mounted artworks, vases on shelves, and even the nightstand next to the bed. LED lights have been widely used as focus lighting in shopping centers, display windows, museums, and homes! The direction of the light beam can be adjusted vertically up to 90 degrees and horizontally up to 330 degrees. The simple and unique design of the light fixture doesn't distract attention from the focal point, making it suitable for various interiors. This light fixture is intended for indoor use only.

## Ceiling light PROLUMEN DL207 black 230V 25W 2300lm 36° IP20 TRIAC 830

**Product code 18029 TRIAC dimmable**

Brand [PROLUMEN](#)  
Supply voltage 230V  
Power factor 0.90  
Dimmable TRIAC  
Output 25W  
Luminous flux 2300lumens  
Luminaire's efficiency lm79 92W  
Correlated colour temperature warm white 3000K  
Lens angle 36  
Cri 80  
Sdcm - macadam ellipses 5  
Protection class IP20  
Lifespan 50000h  
Llmf tm21 L80B10 @25°C 50.000h  
Height 211.0mm  
Diameter 85.0mm  
Casing colour black  
Casing material aluminum  
Work environment indoor use  
Certificates CE, RoHS  
Warranty 5 years



Looking to highlight the impressive features of your space even more? Choose a spot light for this purpose and illuminate every dark corner! This LED spotlight with adjustable light beam is a great tool to showcase wall-mounted artworks, vases on shelves, and even the nightstand next to the bed. LED lights have been widely used as focus lighting in shopping centers, display windows, museums, and homes! The direction of the light beam can be adjusted vertically up to 90 degrees and horizontally up to 330 degrees. The simple and unique design of the light fixture doesn't distract attention from the focal point, making it suitable for various interiors. This light fixture is intended for indoor use only.

## Ceiling light PROLUMEN DL259 black 230V 16W 1550lm 36° IP20 TRIAC 930

**Product code 15784 TRIAC dimmable**

Brand [PROLUMEN](#)  
 Supply voltage 230V  
 Dimmable TRIAC  
 Output 16W  
 Luminous flux 1550lumens  
 Luminaire's efficiency lm79 97W  
 Correlated colour temperature warm white 3000K  
 Lens angle 36  
 Cri 90  
 Sdcm - macadam ellipses 6  
 Protection class IP20  
 Lifespan 50000h  
 Height 60.0mm  
 Width 135.0mm  
 Length 224.0mm  
 Weight 910g  
 Package weight 1010g  
 In package 1pc  
 In box 12pcs  
 Casing colour black  
 Casing material metal + plastic  
 Polishing matt  
 Work environment indoor use  
 Operation temperature -20 ~ 40°C  
 Certificates CE, RoHS, SAA  
 Warranty 5 years



A rectangular designed ceiling light with two directional light beams. This luminaire is suitable for indoor use only, with an IP20 protection class. Thanks to CRI90, the LED luminaire is capable of presenting colors naturally, contributing to the overall atmosphere and feel of the room. We recommend this warm white (3000K) light for both living spaces and work environments. From the LED house product range, you can find several other [ceiling lights](#) that complement this luminaire to create unique lighting effects in your space!

## Ceiling light PROLUMEN DL259 black 230V 8W 700lm 36° IP20 TRIAC 930

**Product code 15783 TRIAC dimmable**

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable TRIAC

Output 8W

Luminous flux 700lumens

Luminaire's efficiency lm79 88W

Correlated colour temperature warm white 3000K

Lens angle 36

Cri 90

Sdcm - macadam ellipses 6

Protection class IP20

Lifespan 50000h

Height 60.0mm

Width 135.0mm

Length 135.0mm

Weight 580g

Package weight 630g

In package 1pc

In box 24pcs

Casing colour black

Casing material metal + plastic


Polishing matt

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE, RoHS, SAA

Warranty 5 years

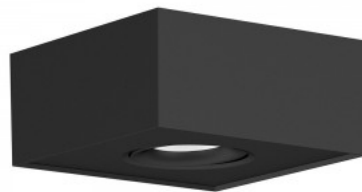

Modern and minimalist lighting for every room! A square ceiling light with dimmable light beam (TRIAC). The direction of the light can be adjusted up to 23 degrees in any direction. Easy installation! Fits well with various design styles due to its minimalist design. LED light is ideal for kitchens, offices, bedrooms, shops, and many other spaces with different purposes. PROLUMEN LED lamps are durable, long-lasting, and environmentally friendly choice!

## Ceiling light PROLUMEN DL259 black 230V 8W 700lm 36° IP20 TRIAC 940

**Product code 16181 TRIAC dimmable**

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable TRIAC

Output 8W

Luminous flux 700lumens

Luminaire's efficiency lm79 88W

Correlated colour temperature pure white 4000K

Lens angle 36

Cri 90

Sdcm - macadam ellipses 6

Protection class IP20

Lifespan 50000h

Height 60.0mm

Width 135.0mm

Length 135.0mm

Weight 580g

Package weight 630g

In package 1pc

In box 24pcs

Casing colour black

Casing material metal + plastic

Polishing matt

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE, RoHS, SAA

Warranty 5 years



Modern and minimalist lighting for every room! A square ceiling light with dimmable light beam (TRIAC). The direction of the light can be adjusted up to 23 degrees in any direction. Easy installation! Fits well with various design styles due to its minimalist design. LED light is ideal for kitchens, offices, bedrooms, shops, and many other spaces with different purposes. PROLUMEN LED lamps are durable, long-lasting, and environmentally friendly choice!

## LED luminaire PROLUMEN DL269A-3 white round 230V 10W 1000lm 60° IP65 940

**Product code 18114**

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 10W

Luminous flux 1000lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature pure white 4000K

Lens angle 60

Cri 90

Ugr 19

Sdcm - macadam ellipses 3

Protection class IP65

Lifespan 50000h

Height 107.0mm

Diameter 90.0mm

In package 1pc

In box 18pcs

Casing colour white

Casing material aluminum

Shape round

Impact resistance IK06

Work environment indoor / outdoor use

Certificates CE, RoHS

Warranty 5 years



Cylindrical PROLUMEN LED light for every interior! IP65 protection class means that the luminaire is water and dust resistant, making it suitable for outdoor use. The DL296B model is available in both warm white (3000K) and daylight (4000K) versions in the LED house range. Come and take a look around our showroom in Tallinn!



## LED luminaire PROLUMEN DL269B 3 black round 230V 15W 1300lm 70° IP65 830

**Product code 16432**

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 15W

Luminous flux 1300lumens

Luminaire's efficiency lm79 87W

Correlated colour temperature warm  
white 3000K

Lens angle 70

Cri 80

Ugr 22

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Height 107.0mm

Diameter 90.0mm

Weight 600g

Package weight 646g

In package 1pc

In box 12pcs

Casing colour black

Casing material aluminum

Shape round

Impact resistance IK08

Work environment indoor / outdoor  
use

Certificates CE, RoHS

Warranty 5 years



Cylindrical PROLUMEN LED light for every interior! IP65 protection class means that the luminaire is water and dust resistant, making it suitable for outdoor use. The DL296B model is available in both warm white (3000K) and daylight (4000K) versions in the LED house range. Come and take a look around our showroom in Tallinn!

## LED luminaire PROLUMEN DL269B 3 black round 230V 35W 2700lm 70° IP65 940

**Product code 17171**

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 35W

Luminous flux 2700lumens

Luminaire's efficiency lm79 77W

Correlated colour temperature pure white 4000K

Lens angle 70

Cri 90

Ugr 22

Sdcm - macadam ellipses 6

Protection class IP65

Lifespan 50000h

Height 119.0mm

Diameter 214.0mm

Weight 600g

Package weight 646g

In package 1pc

In box 6pcs

Casing colour black

Casing material aluminum

Shape round

Impact resistance IK08

Work environment indoor / outdoor use

Certificates CE, RoHS

Warranty 5 years



Cylindrical PROLUMEN LED light for every interior! IP65 protection class means that the luminaire is water and dust resistant, making it suitable for outdoor use. The DL296B model is available in both warm white (3000K) and daylight (4000K) versions in the LED house range. Come and take a look around our showroom in Tallinn!

## LED luminaire PROLUMEN DL269B 3 UGR19 white round 230V 10W 850lm 75° IP65 930

**Product code 16157**

Brand [PROLUMEN](#)  
Supply voltage 230V  
Power factor 0.90  
Output 10W  
Luminous flux 850lumens  
Luminaire's efficiency lm79 85W  
Correlated colour temperature warm  
white 3000K  
Lens angle 75  
Cri 90  
Ugr 19  
Sdcm - macadam ellipses 6  
Protection class IP65  
Lifespan 50000h  
Height 107.0mm  
Diameter 90.0mm  
Weight 600g  
Package weight 646g  
In package 1pc  
In box 12pcs  
Casing colour white  
Casing material aluminum  
Shape round  
Impact resistance IK08  
Work environment indoor / outdoor  
use  
Certificates CE, RoHS  
Warranty 5 years



Surface-mounted LED ceiling light with a round shape. The IP65 protection class means that this luminaire is protected against fine dust and pressure splashes. This indicates that the luminaire is water and dust resistant, making it suitable for outdoor use as well. This luminaire has an ideal color rendering index (CRI90) for workspaces and offices. From the LED house product range, you can find several other [ceiling lights](#) that complement this luminaire to create unique lighting effects in your space!

## LED luminaire PROLUMEN DL269B 5 UGR19 white round 230V 18W 1600lm 75° IP65 930

**Product code 16156**

Brand [PROLUMEN](#)

Supply voltage 230V

Output 18W

Luminous flux 1600lumens

Luminaire's efficiency lm79 89W

Correlated colour temperature warm  
white 3000K

Lens angle 75

Cri 90

Ugr 19

Protection class IP65

Lifespan 50000h

Height 115.0mm

Diameter 130.0mm

Weight 920g

Package weight 1010g

In package 1pc

In box 12pcs

Casing colour white

Casing material aluminum

Shape round

Impact resistance IK08

Work environment indoor / outdoor  
use

Certificates CE, RoHS

Warranty 5 years



Surface-mounted LED ceiling light with a round shape. The IP65 protection class means that this luminaire is protected against fine dust and pressure splashes. This indicates that the luminaire is water and dust resistant, making it suitable for outdoor use as well. This luminaire has an ideal color rendering index (CRI90) for workspaces and offices. From the LED house product range, you can find several other [ceiling lights](#) that complement this luminaire to create unique lighting effects in your space!

## LED luminaire PROLUMEN DL269B 5 UGR19 white round 230V 18W 1600lm 75° IP65 DALI 930

**Product code 16155 DALI dimmable**

Brand [PROLUMEN](#)  
Supply voltage 230V  
Dimmable DALI  
Output 18W  
Luminous flux 1600lumens  
Luminaire's efficiency lm79 89W  
Correlated colour temperature warm  
white 3000K  
Lens angle 75  
Cri 90  
Ugr 19  
Protection class IP65  
Lifespan 50000h  
Height 115.0mm  
Diameter 130.0mm  
Weight 920g  
Package weight 1010g  
In package 1pc  
In box 12pcs  
Casing colour white  
Casing material aluminum  
Shape round  
Impact resistance IK08  
Work environment indoor / outdoor  
use  
Certificates CE, RoHS  
Warranty 5 years



Surface-mounted LED ceiling light with a round shape. The IP65 protection class means that this luminaire is protected against fine dust and pressure splashes. This indicates that the luminaire is water and dust resistant, making it suitable for outdoor use as well. This luminaire has an ideal color rendering index (CRI90) for workspaces and offices. From the LED house product range, you can find several other [ceiling lights](#) that complement this luminaire to create unique lighting effects in your space!

## LED luminaire PROLUMEN DL269B 8 UGR19 white round 230V 25W 2400lm 75° IP65 DALI 930

**Product code 15925 DALI dimmable**

Brand [PROLUMEN](#)  
Supply voltage 230V  
Dimmable DALI  
Output 25W  
Luminous flux 2400lumens  
Luminaire's efficiency lm79 96W  
Correlated colour temperature warm  
white 3000K  
Lens angle 75  
Cri 90  
Ugr 19  
Protection class IP65  
Lifespan 50000h  
Height 119.0mm  
Diameter 214.0mm  
Weight 2200g  
Package weight 2480g  
In package 1pc  
In box 6pcs  
Casing colour white  
Casing material aluminum  
Shape round  
Impact resistance IK08  
Work environment indoor / outdoor  
use  
Certificates CE, RoHS  
Warranty 5 years



Surface-mounted LED ceiling light with a round shape. The IP65 protection class means that this luminaire is protected against fine dust and pressure splashes. This indicates that the luminaire is water and dust resistant, making it suitable for outdoor use as well. This luminaire has an ideal color rendering index (CRI90) for workspaces and offices. From the LED house product range, you can find several other [ceiling lights](#) that complement this luminaire to create unique lighting effects in your space!

## LED downlight PROLUMEN DL322A black round 230V 14W 1300lm 36° IP20 830

**Product code 16313**

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 14W

Luminous flux 1300lumens

Luminaire's efficiency lm79 93W

Correlated colour temperature warm white 3000K

Lens angle 36

Cri 80

Sdcm - macadam ellipses 6

Protection class IP20

Lifespan 50000h

Height 96.0mm

Diameter 120.0mm

In package 1pc

In box 24pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape round

Work environment indoor use

Operation temperature -20 ~ 45°C

Certificates CE, RoHS

Warranty 5 years



Stylish round LED ceiling light, matte black. The direction of the light fixture can be adjusted by rotating the light beam around its axis within a range of 340 degrees. We recommend this warm white (3000K) light fixture for both living spaces and work environments. This LED ceiling lamp is designed as ambient lighting - suitable for use in hotels, homes, offices, shops, and many other spaces. Enhance the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!

## LED downlight PROLUMEN DL340A white 230V 15W 1369lm 36° IP40 930

**Product code 17244**

Brand [PROLUMEN](#)  
Supply voltage 230V  
Power factor 0.90  
Output voltage 40V  
Output 15W  
Rated current 250mA  
Luminous flux 1369lumens  
Luminaire's efficiency lm79 91W  
Correlated colour temperature warm white 3000K  
Lens angle 36  
Cri 90  
Ugr 19  
Sdcm - macadam ellipses 6  
Protection class IP40  
Lifespan 50000h  
Height 108.0mm  
Diameter 100.0mm  
Weight 540g  
Package weight 600g  
In package 1pc  
In box 24pcs  
Casing colour white  
Casing material aluminum  
Work environment indoor use  
Operation temperature -20 ~ 45°C  
Certificates CE  
Warranty 5 years



Modern matte white surface-mounted light. The aluminum matte white body allows for easy adjustment of the light direction. The light fixture rotates within a 360-degree radius, and horizontally, the direction can be adjusted up to 90 degrees. Its minimalist design blends perfectly with various interiors, whether at home, in the office, or in a business environment. With an IP40 protection rating, this surface-mounted light is an ideal choice for home or office environments, providing warm white light at a temperature of 3000K. Thanks to CRI90, the LED light fixture is capable of presenting colors in a natural way, contributing to the overall atmosphere and feeling of the room. Upgrade the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!



## Ceiling light PROLUMEN DL38 black round 230V 15W 1300lm 60° IP54 TRIAC 830

**Product code 15109 TRIAC dimmable**

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 15W

Luminous flux 1300lumens

Luminaire's efficiency lm79 87W

Correlated colour temperature warm  
white 3000K

Lens angle 60

Cri 80

Sdcm - macadam ellipses 6

Protection class IP54

Lifespan 50000h

Height 100.0mm

Diameter 90.0mm

Weight 520g

Package weight 630g

In package 1pc

In box 40pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape round

Work environment indoor use

Operation temperature -20 ~ 45°C

Certificates CE, RoHS

Warranty 5 years



LED light fixture with a round shape for indoor use. The LED light fixture is easily installable on ceilings and walls. Suitable for homes, offices, and conference rooms. Environmentally friendly and stylish light fixture that renders colors accurately in rooms and has a very long lifespan (50,000 hours). DL38 luminaires are easy to install, maintain, and use! LED house offers both daylight (4000K) and warm light (3000K) variants. The light beam is dimmable (TRIAC/DALI).

## Ceiling light PROLUMEN DL38 black round 230V 15W 1300lm 60° IP54 TRIAC 840

**Product code 15309 TRIAC dimmable**

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 15W

Luminous flux 1300lumens

Luminaire's efficiency lm79 87W

Correlated colour temperature pure  
white 4000K

Lens angle 60

Cri 80

Sdcm - macadam ellipses 6

Protection class IP54

Lifespan 50000h

Height 100.0mm

Diameter 90.0mm

Weight 520g

Package weight 630g

In package 1pc

In box 24pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape round

Work environment indoor use

Operation temperature -20 ~ 45°C

Certificates CE, RoHS

Warranty 5 years



LED light fixture with a round shape for indoor use. The LED light fixture is easily installable on ceilings and walls. Suitable for homes, offices, and conference rooms. Environmentally friendly and stylish light fixture that renders colors accurately in rooms and has a very long lifespan (50,000 hours). DL38 luminaires are easy to install, maintain, and use! LED house offers both daylight (4000K) and warm light (3000K) variants. The light beam is dimmable (TRIAC/DALI).

## LED luminaire PROLUMEN DL38 black round 230V 25W 2700lm 45° IP54 TRIAC 830

**Product code 15543 TRIAC dimmable**

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 25W

Luminous flux 2700lumens

Luminaire's efficiency lm79 108W

Correlated colour temperature warm  
white 3000K

Lens angle 45

Cri 80

Sdcm - macadam ellipses 6

Protection class IP54

Lifespan 50000h

Height 110.0mm

Diameter 120.0mm

Weight 750g

Package weight 860g

In box 18pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape round

Work environment indoor use

Operation temperature -20 ~ 45°C

Certificates CE, RoHS

Warranty 5 years



LED light fixture with a round shape for indoor use. The LED light fixture is easily installable on ceilings and walls. Suitable for homes, offices, and conference rooms. Environmentally friendly and stylish light fixture that renders colors accurately in rooms and has a very long lifespan (50,000 hours). DL38 luminaires are easy to install, maintain, and use! LED house offers both daylight (4000K) and warm light (3000K) variants. The light beam is dimmable (TRIAC/DALI).

## LED luminaire PROLUMEN DL38 black round 230V 35W 3400lm 36° IP54 TRIAC 940

**Product code 14586 TRIAC dimmable**

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 35W

Luminous flux 3400lumens

Luminaire's efficiency lm79 97W

Correlated colour temperature pure white 4000K

Lens angle 36

Cri 90

Sdcm - macadam ellipses 6

Protection class IP54

Lifespan 50000h

Height 120.0mm

Diameter 160.0mm

Weight 1300g

Package weight 1458g

In box 12pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape round

Work environment indoor use

Operation temperature -20 ~ 45°C

Certificates CE, RoHS

Warranty 5 years



LED light fixture with a round shape for indoor use. The LED light fixture is easily installable on ceilings and walls. Suitable for homes, offices, and conference rooms. Environmentally friendly and stylish light fixture that renders colors accurately in rooms and has a very long lifespan (50,000 hours). DL38 luminaires are easy to install, maintain, and use! LED house offers both daylight (4000K) and warm light (3000K) variants. The light beam is dimmable (TRIAC/DALI).

## LED luminaire PROLUMEN DL38 black round 230V 35W 3400lm 60° IP54 TRIAC 930

**Product code 15442 TRIAC dimmable**

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 35W

Luminous flux 3400lumens

Luminaire's efficiency lm79 97W

Correlated colour temperature warm  
white 3000K

Lens angle 60

Cri 90

Sdcm - macadam ellipses 6

Protection class IP54

Lifespan 50000h

Height 120.0mm

Diameter 160.0mm

Weight 1300g

Package weight 1458g

In box 12pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape round

Work environment indoor use

Operation temperature -20 ~ 45°C

Certificates CE, RoHS

Warranty 5 years



LED light fixture with a round shape for indoor use. The LED light fixture is easily installable on ceilings and walls. Suitable for homes, offices, and conference rooms. Environmentally friendly and stylish light fixture that renders colors accurately in rooms and has a very long lifespan (50,000 hours). DL38 luminaires are easy to install, maintain, and use! LED house offers both daylight (4000K) and warm light (3000K) variants. The light beam is dimmable (TRIAC/DALI).

## LED luminaire PROLUMEN DL38 white 230V 10W 1500lm 60° IP54 DALI 930

**Product code 17370 DALI dimmable**

Brand [PROLUMEN](#)  
Supply voltage 230V  
Power factor 0.90  
Dimmable DALI  
Output 10W  
Luminous flux 1500lumens  
Luminaire's efficiency lm79 150W  
Correlated colour temperature warm  
white 3000K  
Lens angle 60  
Cri 90  
Sdcm - macadam ellipses 6  
Protection class IP54  
Lifespan 50000h  
Height 120.0mm  
Diameter 110.0mm  
In package 1pc  
In box 18pcs  
Casing colour white  
Casing material aluminum  
Work environment indoor / outdoor  
use  
Operation temperature -20 ~ 45°C  
Certificates CE, RoHS  
Warranty 5 years



LED light fixture with a round shape for indoor use. The LED light fixture is easily installable on ceilings and walls. Suitable for homes, offices, and conference rooms. Environmentally friendly and stylish light fixture that renders colors accurately in rooms and has a very long lifespan (50,000 hours). DL38 luminaires are easy to install, maintain, and use! LED house offers both daylight (4000K) and warm light (3000K) variants. The light beam is dimmable (TRIAC/DALI).

## Ceiling light PROLUMEN DL38 white 230V 10W 800lm 60° IP54 TRIAC 930

**Product code 15281 TRIAC dimmable**

Brand [PROLUMEN](#)  
Supply voltage 230V  
Power factor 0.90  
Dimmable TRIAC  
Output 10W  
Luminous flux 800lumens  
Luminaire's efficiency lm79 80W  
Correlated colour temperature warm white 3000K  
Lens angle 60  
Cri 90  
Sdcm - macadam ellipses 6  
Protection class IP54  
Lifespan 50000h  
Height 100.0mm  
Diameter 90.0mm  
Weight 474g  
Package weight 537g  
In package 1pc  
In box 24pcs  
Casing colour white  
Casing material aluminum  
Work environment indoor use  
Operation temperature -20 ~ 45°C  
Certificates CE, RoHS  
Warranty 5 years



LED light fixture with a round shape for indoor use. The LED light fixture is easily installable on ceilings and walls. Suitable for homes, offices, and conference rooms. Environmentally friendly and stylish light fixture that renders colors accurately in rooms and has a very long lifespan (50,000 hours). DL38 luminaires are easy to install, maintain, and use! LED house offers both daylight (4000K) and warm light (3000K) variants. The light beam is dimmable (TRIAC/DALI).

## Ceiling light PROLUMEN DL38 white 230V 15W 1300lm 60° IP54 TRIAC 840

**Product code 14874 TRIAC dimmable**

Brand [PROLUMEN](#)  
Supply voltage 230V  
Power factor 0.90  
Dimmable TRIAC  
Output 15W  
Luminous flux 1300lumens  
Luminaire's efficiency lm79 87W  
Correlated colour temperature pure white 4000K  
Lens angle 60  
Cri 80  
Sdcm - macadam ellipses 6  
Protection class IP54  
Lifespan 50000h  
Height 100.0mm  
Diameter 90.0mm  
Weight 474g  
Package weight 537g  
In package 1pc  
In box 24pcs  
Casing colour white  
Casing material aluminum  
Work environment indoor use  
Operation temperature -20 ~ 45°C  
Certificates CE, RoHS  
Warranty 5 years



LED light fixture with a round shape for indoor use. The LED light fixture is easily installable on ceilings and walls. Suitable for homes, offices, and conference rooms. Environmentally friendly and stylish light fixture that renders colors accurately in rooms and has a very long lifespan (50,000 hours). DL38 luminaires are easy to install, maintain, and use! LED house offers both daylight (4000K) and warm light (3000K) variants. The light beam is dimmable (TRIAC/DALI).



## Ceiling light PROLUMEN DL38 white 230V 15W 1300lm 60° IP54 TRIAC 930

**Product code 15267 TRIAC dimmable**

Brand [PROLUMEN](#)  
Supply voltage 230V  
Power factor 0.90  
Dimmable TRIAC  
Output 15W  
Luminous flux 1300lumens  
Luminaire's efficiency lm79 87W  
Correlated colour temperature warm white 3000K  
Lens angle 60  
Cri 90  
Sdcm - macadam ellipses 6  
Protection class IP54  
Lifespan 50000h  
Height 110.0mm  
Diameter 120.0mm  
Weight 520g  
Package weight 630g  
In package 1pc  
In box 24pcs  
Casing colour white  
Casing material aluminum  
Work environment indoor use  
Operation temperature -20 ~ 45°C  
Certificates CE, RoHS  
Warranty 5 years



LED light fixture with a round shape for indoor use. The LED light fixture is easily installable on ceilings and walls. Suitable for homes, offices, and conference rooms. Environmentally friendly and stylish light fixture that renders colors accurately in rooms and has a very long lifespan (50,000 hours). DL38 luminaires are easy to install, maintain, and use! LED house offers both daylight (4000K) and warm light (3000K) variants. The light beam is dimmable (TRIAC/DALI).

## LED luminaire PROLUMEN DL38 white 230V 25W 2300lm 45° IP54 DALI 940

**Product code 15328 DALI dimmable**

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 25W

Luminous flux 2300lumens

Luminaire's efficiency lm79 92W

Correlated colour temperature pure white 4000K

Lens angle 45

Cri 90

Sdcm - macadam ellipses 6

Protection class IP54

Lifespan 50000h

Height 110.0mm

Diameter 120.0mm

Weight 750g

Package weight 860g

In box 18pcs

Casing colour white

Casing material aluminum

Work environment indoor use

Operation temperature -20 ~ 45°C

Certificates CE, RoHS

Warranty 5 years



LED light fixture with a round shape for indoor use. The LED light fixture is easily installable on ceilings and walls. Suitable for homes, offices, and conference rooms. Environmentally friendly and stylish light fixture that renders colors accurately in rooms and has a very long lifespan (50,000 hours). DL38 luminaires are easy to install, maintain, and use! LED house offers both daylight (4000K) and warm light (3000K) variants. The light beam is dimmable (TRIAC/DALI).

## LED luminaire PROLUMEN DL38 white 230V 25W 2300lm 45° IP54 TRIAC 940

**Product code 15327 TRIAC dimmable**

Brand [PROLUMEN](#)  
Supply voltage 230V  
Power factor 0.90  
Dimmable TRIAC  
Output 25W  
Luminous flux 2300lumens  
Luminaire's efficiency lm79 92W  
Correlated colour temperature pure white 4000K  
Lens angle 45  
Cri 90  
Sdcm - macadam ellipses 6  
Protection class IP54  
Lifespan 50000h  
Height 110.0mm  
Diameter 120.0mm  
Weight 750g  
Package weight 860g  
In box 18pcs  
Casing colour white  
Casing material aluminum  
Work environment indoor use  
Operation temperature -20 ~ 45°C  
Certificates CE, RoHS  
Warranty 5 years



LED light fixture with a round shape for indoor use. The LED light fixture is easily installable on ceilings and walls. Suitable for homes, offices, and conference rooms. Environmentally friendly and stylish light fixture that renders colors accurately in rooms and has a very long lifespan (50,000 hours). DL38 luminaires are easy to install, maintain, and use! LED house offers both daylight (4000K) and warm light (3000K) variants. The light beam is dimmable (TRIAC/DALI).

## LED luminaire PROLUMEN DL38 white 230V 25W 2700lm 45° IP54 TRIAC 930

**Product code 14935 TRIAC dimmable**

Brand [PROLUMEN](#)  
Supply voltage 230V  
Power factor 0.90  
Dimmable TRIAC  
Output 25W  
Luminous flux 2700lumens  
Luminaire's efficiency lm79 108W  
Correlated colour temperature warm  
white 3000K  
Lens angle 45  
Cri 90  
Sdcm - macadam ellipses 6  
Protection class IP54  
Lifespan 50000h  
Height 110.0mm  
Diameter 120.0mm  
Weight 750g  
Package weight 860g  
In box 18pcs  
Casing colour white  
Casing material aluminum  
Work environment indoor use  
Operation temperature -20 ~ 45°C  
Certificates CE, RoHS  
Warranty 5 years



LED light fixture with a round shape for indoor use. The LED light fixture is easily installable on ceilings and walls. Suitable for homes, offices, and conference rooms. Environmentally friendly and stylish light fixture that renders colors accurately in rooms and has a very long lifespan (50,000 hours). DL38 luminaires are easy to install, maintain, and use! LED house offers both daylight (4000K) and warm light (3000K) variants. The light beam is dimmable (TRIAC/DALI).

## LED luminaire PROLUMEN DL38 white 230V 35W 3400lm 36° IP54 930

**Product code 15564**

Brand [PROLUMEN](#)  
Supply voltage 230V  
Power factor 0.90  
Output 35W  
Luminous flux 3400lumens  
Luminaire's efficiency lm79 97W  
Correlated colour temperature warm white 3000K  
Lens angle 36  
Cri 90  
Sdcm - macadam ellipses 6  
Protection class IP54  
Lifespan 50000h  
Height 120.0mm  
Diameter 160.0mm  
Weight 1300g  
Package weight 1458g  
In box 12pcs  
Casing colour white  
Casing material aluminum  
Work environment indoor use  
Operation temperature -20 ~ 45°C  
Certificates CE, RoHS  
Warranty 5 years



LED light fixture with a round shape for indoor use. The LED light fixture is easily installable on ceilings and walls. Suitable for homes, offices, and conference rooms. Environmentally friendly and stylish light fixture that renders colors accurately in rooms and has a very long lifespan (50,000 hours). DL38 luminaires are easy to install, maintain, and use! LED house offers both daylight (4000K) and warm light (3000K) variants. The light beam is dimmable (TRIAC/DALI).

## LED luminaire PROLUMEN DL38 white 230V 35W 3400lm 36° IP54 940

**Product code 15563**

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Output 35W

Luminous flux 3400lumens

Luminaire's efficiency lm79 97W

Correlated colour temperature pure white 4000K

Lens angle 36

Cri 90

Sdcm - macadam ellipses 6

Protection class IP54

Lifespan 50000h

Height 120.0mm

Diameter 160.0mm

Weight 1300g

Package weight 1458g

In box 12pcs

Casing colour white

Casing material aluminum

Work environment indoor use

Operation temperature -20 ~ 45°C

Certificates CE, RoHS

Warranty 5 years



LED light fixture with a round shape for indoor use. The LED light fixture is easily installable on ceilings and walls. Suitable for homes, offices, and conference rooms. Environmentally friendly and stylish light fixture that renders colors accurately in rooms and has a very long lifespan (50,000 hours). DL38 luminaires are easy to install, maintain, and use! LED house offers both daylight (4000K) and warm light (3000K) variants. The light beam is dimmable (TRIAC/DALI).

## LED luminaire PROLUMEN DL38 white 230V 35W 3400lm 36° IP54 DALI 930

**Product code 15567 DALI dimmable**

Brand [PROLUMEN](#)  
Supply voltage 230V  
Power factor 0.90  
Dimmable DALI  
Output 35W  
Luminous flux 3400lumens  
Luminaire's efficiency lm79 97W  
Correlated colour temperature warm  
white 3000K  
Lens angle 36  
Cri 90  
Sdcm - macadam ellipses 6  
Protection class IP54  
Lifespan 50000h  
Height 120.0mm  
Diameter 160.0mm  
Weight 1300g  
Package weight 1458g  
In box 12pcs  
Casing colour white  
Casing material aluminum  
Work environment indoor use  
Operation temperature -20 ~ 45°C  
Certificates CE, RoHS  
Warranty 5 years



LED light fixture with a round shape for indoor use. The LED light fixture is easily installable on ceilings and walls. Suitable for homes, offices, and conference rooms. Environmentally friendly and stylish light fixture that renders colors accurately in rooms and has a very long lifespan (50,000 hours). DL38 luminaires are easy to install, maintain, and use! LED house offers both daylight (4000K) and warm light (3000K) variants. The light beam is dimmable (TRIAC/DALI).

## LED luminaire PROLUMEN DL38 white 230V 35W 3400lm 36° IP54 DALI 940

**Product code 14929 DALI dimmable**

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 35W

Luminous flux 3400lumens

Luminaire's efficiency lm79 97W

Correlated colour temperature pure white 4000K

Lens angle 36

Cri 90

Sdcm - macadam ellipses 6

Protection class IP54

Lifespan 50000h

Height 120.0mm

Diameter 160.0mm

Weight 1300g

Package weight 1458g

In box 12pcs

Casing colour white

Casing material aluminum

Work environment indoor use

Operation temperature -20 ~ 45°C

Certificates CE, RoHS

Warranty 5 years



LED light fixture with a round shape for indoor use. The LED light fixture is easily installable on ceilings and walls. Suitable for homes, offices, and conference rooms. Environmentally friendly and stylish light fixture that renders colors accurately in rooms and has a very long lifespan (50,000 hours). DL38 luminaires are easy to install, maintain, and use! LED house offers both daylight (4000K) and warm light (3000K) variants. The light beam is dimmable (TRIAC/DALI).



## LED luminaire PROLUMEN DL38 white 230V 35W 3400lm 36° IP54 TRIAC 940

**Product code 14508 TRIAC dimmable**

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable TRIAC

Output 35W

Luminous flux 3400lumens

Luminaire's efficiency lm79 97W

Correlated colour temperature pure white 4000K

Lens angle 36

Cri 90

Sdcm - macadam ellipses 6

Protection class IP54

Lifespan 50000h

Height 120.0mm

Diameter 160.0mm

Weight 1300g

Package weight 1458g

In box 12pcs

Casing colour white

Casing material aluminum

Work environment indoor use

Operation temperature -20 ~ 45°C

Certificates CE, RoHS

Warranty 5 years



LED light fixture with a round shape for indoor use. The LED light fixture is easily installable on ceilings and walls. Suitable for homes, offices, and conference rooms. Environmentally friendly and stylish light fixture that renders colors accurately in rooms and has a very long lifespan (50,000 hours). DL38 luminaires are easy to install, maintain, and use! LED house offers both daylight (4000K) and warm light (3000K) variants. The light beam is dimmable (TRIAC/DALI).

## Ceiling light PROLUMEN DL52 white 230V 18W 1584lm 100° IP54 930

**Product code 15610**

Brand [PROLUMEN](#)

Supply voltage 230V

Output 18W

Luminous flux 1584lumens

Luminaire's efficiency lm79 88W

Correlated colour temperature warm  
white 3000K

Lens angle 100

Cri 90

Protection class IP54

Lifespan 50000h

Height 68.0mm

Diameter 170.0mm

Weight 474g

Package weight 537g

In package 1pc

In box 24pcs

Casing colour white

Casing material aluminum

Work environment indoor use

Certificates CE, RoHS

Warranty 5 years



Surface-mounted LED ceiling light with a round shape. The IP54 protection class means that this luminaire is protected against ordinary dust and splashes from any direction. This luminaire has an ideal color rendering index (CRI90) for workspaces and offices. The light temperature of the luminaire is 3000K, providing warm white light to the room. For homes, we recommend warm white ceiling lights for bedrooms, living rooms, and dining areas. With proper use, the luminaire is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). From the LED house product range, you can find several other [ceiling lights](#) that complement this luminaire to create unique lighting effects in your space!

## Ceiling light PROLUMEN Lunel black 230V GU10 IP20

**Product code 16403**

Brand [PROLUMEN](#)  
 Supply voltage 230V  
 Maximum output 5W/1m  
 Socket GU10  
 Protection class IP20  
 Height 95.0mm  
 Diameter 54.0mm  
 In package 1pc  
 In box 30pcs  
 Casing colour black  
 Casing material aluminum  
 Work environment indoor use  
 Operation temperature -20 ~ 40°C  
 Certificates CE  
 Warranty 5 years

With its elegant design, the compact GU10 ceiling light is perfect for home use. The maximum height of the bulb is 75mm. Featuring an elegant design, the compact GU10 light fixture is ideal for home use. Its minimalist design blends perfectly into various interiors, whether at home, in the office, or in a business environment. This IP20-rated ceiling light is an ideal choice for home or office environments. You can choose this Lunel series light as a [ceiling light](#), surface-mounted [black](#) or [white](#) light, and also as a [recessed light](#). As a ceiling light, it attaches to the 3F rail. The maximum height of the bulb is 75mm. With proper use, the light fixture is energy-efficient, environmentally friendly, and has a very long lifespan (50,000 hours). Come and take a look around our showroom in Tallinn!



## Ceiling light PROLUMEN Lunel black 230V GU10 IP20

**Product code 16404**

Brand [PROLUMEN](#)  
Supply voltage 230V  
Maximum output 5W/1m  
Socket GU10  
Protection class IP20  
Height 95.0mm  
Diameter 54.0mm  
Installation opening diameter  
65-70mm  
In package 1pc  
In box 30pcs  
Casing colour black  
Casing material aluminum  
Work environment indoor use  
Operation temperature -20 ~ 40°C  
Certificates CE  
Warranty 5 years



With its elegant design, the compact and recessed GU10 ceiling light is perfect for home use. The maximum height of the bulb is 75mm. Featuring an elegant design, the compact GU10 light fixture is ideal for home use. Its minimalist design blends perfectly into various interiors, whether at home, in the office, or in a business environment. This IP20-rated ceiling light is an ideal choice for home or office environments. You can choose this Lunel series light as a [ceiling light](#), surface-mounted [black](#) or [white](#) light, and also as a [recessed light](#). As a ceiling light, it attaches to the 3F rail. The maximum height of the bulb is 75mm. Come and take a look around our showroom in Tallinn!

## Ceiling light PROLUMEN Lunel white 230V GU10 IP20

**Product code 16830**

Brand [PROLUMEN](#)  
 Supply voltage 230V  
 Maximum output 5W/1m  
 Socket GU10  
 Protection class IP20  
 Height 95.0mm  
 Diameter 54.0mm  
 In package 1pc  
 In box 30pcs  
 Casing colour white  
 Casing material aluminum  
 Work environment indoor use  
 Operation temperature -20 ~ 40°C  
 Certificates CE  
 Warranty 5 years



With its elegant design, the compact GU10 ceiling light is perfect for home use. The maximum height of the bulb is 75mm. Featuring an elegant design, the compact GU10 light fixture is ideal for home use. Its minimalist design blends perfectly into various interiors, whether at home, in the office, or in a business environment. This IP20-rated ceiling light is an ideal choice for home or office environments. You can choose this Lunel series light as a [ceiling light](#), surface-mounted [black](#) or [white](#) light, and also as a [recessed light](#). As a ceiling light, it attaches to the 3F rail. The maximum height of the bulb is 75mm. Come and take a look around our showroom in Tallinn!

## Ceiling light PROLUMEN Newcastle with nickel ring surface mounted black 230V 15W 1500lm 40° IP20 940

## Product code 16207

---

Brand [PROLUMEN](#)  
Supply voltage 230V  
Power factor 0.90  
Output 15W  
Luminous flux 1500lumens  
Luminaire's efficiency lm79 100W  
Correlated colour temperature pure white 4000K  
Lens angle 40  
Source of light CITIZEN LED  
Cri 90  
Sdcm - macadam ellipses 3  
Protection class IP20  
Lifespan 50000h  
Height 152.0mm  
Diameter 75.0mm  
In package 1pc  
In box 24pcs  
Casing colour black  
Casing material aluminum  
Polishing matt  
Power supply [LIFUD](#)  
Work environment indoor use  
Certificates CE, RoHS  
Warranty 5 years



The LED pendant light Newcastle is a stylish and functional pendant light that fits into modern interiors. It has a modern and eye-catching appearance, made of high-quality and durable materials, ensuring a long lifespan. The light fixture is available in both surface-mounted and pendant versions. External housings are available in black and white, with internal rims in black, silver, and nickel - explore more in the LED house product range! Option to order with different light temperatures: Very warm white 2700K Warm white 3000K Daylight 4000K Option to order with different lens optics 20°/40°. Come and take a look at our showroom in Tallinn!

## LED downlight PROLUMEN Newcastle with silver ring surface mounted black round 230V 20W 2000lm 40° IP20 DALI 940

**Product code 16288 DALI dimmable**

Brand [PROLUMEN](#)

Supply voltage 230V

Power factor 0.90

Dimmable DALI

Output 20W

Luminous flux 2000lumens

Luminaire's efficiency lm79 100W

Correlated colour temperature pure white 4000K

Lens angle 40

Source of light CITIZEN LED

Cri 90

Sdcm - macadam ellipses 3

Protection class IP20

Lifespan 50000h

Height 152.0mm

Diameter 115.0mm

In box 18pcs

Casing colour black

Casing material aluminum

Polishing matt

Shape round

Work environment indoor use

Operation temperature -20 ~ 40°C

Certificates CE

Warranty 5 years



The LED pendant light Newcastle is a stylish and functional pendant light that fits into modern interiors. It has a modern and eye-catching appearance, made of high-quality and durable materials, ensuring a long lifespan. The light fixture is available in both surface-mounted and pendant versions. External housings are available in black and white, with internal rims in black, silver, and nickel - explore more in the LED house product range! Option to order with different light temperatures: Very warm white 2700K Warm white 3000K Daylight 4000K Option to order with different lens optics 20°/40°. Come and take a look at our showroom in Tallinn!

## Ceiling light PROLUMEN RD01 white 230V 45W 3550lm 120° IP20 840

**Product code 15344**

Brand [PROLUMEN](#)

Supply voltage 230V

Output 45W

Luminous flux 3550lumens

Luminaire's efficiency lm79 79W

Correlated colour temperature pure white 4000K

Lens angle 120

Cri 80

Protection class IP20

Lifespan 40000h

Height 114.4mm

Width 145.0mm

Length 235.0mm

Weight 1899g

Package weight 2100g

In package 1pc

Casing colour white

Polishing matt

Work environment indoor use

Warranty 5 years



Recessed LED ceiling light, designed to fit shopping centers, hotels, schools, staircases, and many other diverse indoor spaces. Suitable for installation in dry indoor areas. Illuminate your world with the help of LED House professionals - see our project portfolio here!



## Ceiling light PROLUMEN RD01-C white 230V 40W 3800lm CRI90 90° IP20 3000K, 4000K, 6000K WW/DW/CW

**Product code 15017**

Brand [PROLUMEN](#)

Supply voltage 230V

Output 40W

Luminous flux 3800lumens

Luminaire's efficiency lm79 95W

Correlated colour temperature

WW/DW/CW 3000K, 4000K, 6000K

Lens angle 90

Cri 90

Protection class IP20

Lifespan 40000h

Casing colour white

Polishing matt

Work environment indoor use

Warranty 5 years

CCT selectable ceiling light with a button. Project sales, minimum order quantity required. When used properly, the light is energy-efficient, environmentally friendly, and has a very long lifespan (50,000h). Come and visit our showroom in Tallinn!



## Ceiling light PROLUMEN TL13 white 230V 20W 1600lm CRI80 IP20 TRIAC

**Product code 14618 TRIAC dimmable**

Brand [PROLUMEN](#)

Supply voltage 230V

Dimmable TRIAC

Output 20W

Luminous flux 1600lumens

Luminaire's efficiency lm79 80W

Cri 80

Protection class IP20

Lifespan 40000h

Height 148.0mm

Width 449.0mm

Length 117.5mm

Diameter 65.0mm

In box 6pcs

Casing colour white

Casing material aluminum + plastic

Polishing matt

Work environment indoor use

Certificates CE, RoHS, SAA


Warranty 5 years



## Ceiling light SISYR black round GU10 IP20

### Product code 16309

Maximum output 35W/1m  
 Socket GU10  
 Protection class IP20  
 Height 140.0mm  
 Diameter 90.0mm  
 In box 20pcs  
 Casing colour black  
 Casing material aluminum  
 Polishing matt  
 Shape round  
 Work environment indoor use

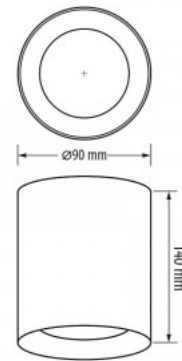

Cylindrical housing for GU10 light bulb.

## Ceiling light Tube white GU10

### Product code 15358

Socket GU10  
 Height 125.0mm  
 Diameter 96.0mm  
 Casing colour white  
 Casing material aluminum  
 Polishing matt  
 Work environment indoor use



Round surface-mounted housing for GU10 bulb.

## Ceiling light Tube white round GU10 IP20

### Product code 17149

---

Socket GU10  
Protection class IP20  
Height 122.0mm  
Diameter 94.0mm  
In box 20pcs  
Casing colour white  
Casing material aluminum  
Polishing matt  
Shape round  
Work environment indoor use

Round surface-mounted housing for  
GU10 bulb.

