


Solar panel AIKO Neostar 2S MAH60MB-G2 1954x1134x30mm 500W IP68

Product code 22323


Brand [AIKO](#)
Output 500W
Protection class IP68
Height 30.0mm
Width 1134.0mm
Length 1954.0mm
Solar efficiency 22.6%
Cell type N-type ABC, 120(6*20)
Vmp stc 37.9V
Imp stc 13.2A
Voc stc 45.02V
Isc stc 14.05A

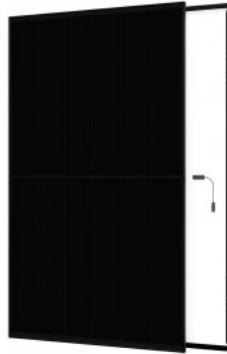

Solar panel AIKO Neostar 2S MAH60MB-G2 1954x1134x30mm 510W IP68

Product code 22294


Brand [AIKO](#)
Output 510W
Protection class IP68
Height 30.0mm
Width 1134.0mm
Length 1954.0mm
Weight 24 kg
In box 36pcs
Work environment outdoor use
Solar efficiency 23%
Cell type N-type ABC, 120(6*20)
Vmp stc 38.1V
Imp stc 13.39A
Voc stc 45.22V
Isc stc 14.17A

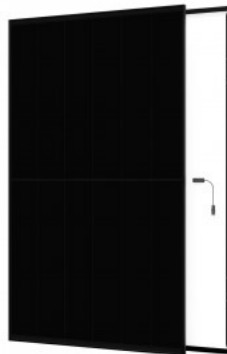

Solar panel AIKO Neostar 2S MAH60MB-G2 1954x1134x30mm 515W IP68

Product code 22376

Brand [AIKO](#)
 Output 515W
 Protection class IP68
 Height 30.0mm
 Width 1134.0mm
 Length 1954.0mm
 Weight 24 kg
 In box 36pcs
 Work environment outdoor use
 Solar efficiency 23.2%
 Cell type N-type ABC, 120(6*20)
 Vmp stc 38.2V
 Imp stc 13.49A
 Voc stc 45.32V
 Isc stc 14.23A

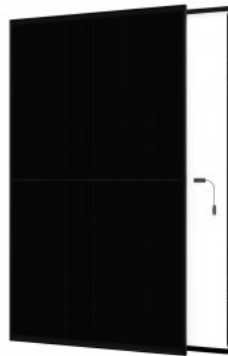

Solar panel AIKO Neostar 2S+ MAH60DB N-TYPE TOPCON Bifacial 1954x1134x30mm 515W IP68

Product code 22369


Brand [AIKO](#)
 Output 515W
 Protection class IP68
 Height 30.0mm
 Width 1134.0mm
 Length 1954.0mm
 Weight 27.2 kg
 In box 37pcs
 Work environment outdoor use
 Operation temperature -40C- +85°C
 Certificates CE, IEC standard IEC 61215 / IEC 61730 / ISO 9001: 2015
 Solar efficiency 23.2%
 Cell type N-type ABC, 120(6*20)
 Vmp stc 38.2V
 Imp stc 13.49A
 Voc stc 45.32V
 Isc stc 14.23A
 Bifacial Yes



Solar panel AIKO Polaris 1N+ G645-MCH72DW 2382x1134x30mm 645W IP68

Product code 22372

Brand [AIKO](#)
Output 645W
Protection class IP68
Height 30.0mm
Width 1134.0mm
Length 2382.0mm
In box 36pcs
Solar efficiency 23.9%
Cell type N-Type ABC, 144(6*24)
Vmp stc 45.2V
Imp stc 14.27A
Voc stc 53.9V
Isc stc 15A
Bifacial Yes

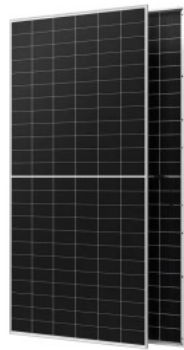

Solar panel Trinasolar Trina Vertex S 1961x1134x30mm 515W IP68

Product code 22514

Brand [Trinasolar](#)
Output 515W
Protection class IP68
Height 30.0mm
Width 1134.0mm
Length 1961.0mm
Weight 23.5 kg
In box 36pcs
Work environment outdoor use
Solar efficiency 23.2%
Cell type N type i-TOPCon
Vmp stc 33.9V
Imp stc 15.2A
Voc stc 40.9V
Isc stc 15.96A

