




# LED strip REVAL BULB 108LED 1m can be cut after each LED 24V 18W 805lm 120° IP20 RGB

#### Product code 17186

**Brand REVAL BULB** Supply voltage 24V Output 18W Maximum output 18W/1m Luminous flux 805lumens Luminaire's efficiency Im79 45W Correlated colour temperature RGB **RGB** Lens angle 120 Source of light SANAN LED Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 2.1mm Width 10.0mm Minimum length 9.3mm Length 1000.0mm In package 5m Work environment indoor use Certificates CE. RoHS Warranty 5 years

High-quality LED strip with a thick circuit board. A unique feature is the ability to cut the strip after each LED, making it ideal for installation in complex situations! LED strips are flexible and can be easily customized to fit various installation needs and surfaces, such as furniture, shelves, stairs, etc. This RGB LED strip allows for a wide range of colours, including various shades that can be adjusted according to user preferences or the situation. The specified price is for 1 meter of the strip. You can trust in our products because we sell hundreds of meters of LED strips every day! Send us an inquiry, and we'll make you an offer!







# LED strip REVAL BULB 120LED 1m 12V 14.4W 1400lm 120° IP20 927

### **Product code 17850**

**Brand REVAL BULB** Supply voltage 12V Output 14.4W Maximum output 14.4W/1m Luminous flux 1400lumens Luminaire's efficiency Im79 97W Correlated colour temperature warm white 2700K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 8.0mm Minimum length 25.0mm Length 1000.0mm Work environment indoor use Certificates CE, RoHS Warranty 5 years







# LED strip REVAL BULB 120LED 1m 12V 14.4W 1573lm 120° IP20 930

### **Product code 14587**

**Brand REVAL BULB** Supply voltage 12V Output 14.4W Maximum output 14.4W/1m Luminous flux 1573lumens Luminaire's efficiency lm79 109W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 8.0mm Minimum length 25.0mm Length 1000.0mm Work environment indoor use Certificates CE, RoHS Warranty 5 years







# LED strip REVAL BULB 120LED 1m 12V 14.4W 1626lm 120° IP20 960

### **Product code 14984**

**Brand REVAL BULB** Supply voltage 12V Output 14.4W Maximum output 14.4W/1m Luminous flux 1626lumens Luminaire's efficiency lm79 113W Correlated colour temperature cold white 6000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 8.0mm Minimum length 25.0mm Length 1000.0mm Work environment indoor use Certificates CE, RoHS Warranty 5 years







# LED strip REVAL BULB 120LED 1m 12V 14.4W 1668lm 120° IP20 940

### **Product code 14543**

**Brand REVAL BULB** Supply voltage 12V Output 14.4W Maximum output 14.4W/1m Luminous flux 1668lumens Luminaire's efficiency lm79 116W Correlated colour temperature pure white 4000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 8.0mm Minimum length 25.0mm Length 1000.0mm Work environment indoor use Certificates CE, RoHS Warranty 5 years







# LED strip REVAL BULB 120LED 1m 24V 14.4W 1344lm CRI90 120° IP20 3000K-4000K 2CCT

### Product code 15560

**Brand REVAL BULB** Supply voltage 24V Output 14.4W Maximum output 14.4W/1m Luminous flux 1344lumens Luminaire's efficiency Im79 93W Correlated colour temperature 2CCT 3000K-4000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 10.0mm Minimum length 100.0mm Length 1000.0mm Work environment indoor use Operation temperature -30 - +45°C Certificates CE, RoHS Warranty 5 years







## LED strip REVAL BULB 120LED 1m 24V 14.4W 1550lm CRI90 120° IP20 2700K-6000K warm + cold white

#### **Product code 14449**

Brand REVAL BULB Supply voltage 24V Output 14.4W Maximum output 14.4W/1m Luminous flux 1550lumens Luminaire's efficiency lm79 108W Correlated colour temperature warm + cold white 2700K-6000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 10.0mm Minimum length 100.0mm Length 1000.0mm Work environment indoor use Operation temperature -30 - +45°C Certificates CE, RoHS Warranty 5 years

High-quality LED strip. 2835 LED diode with good light efficiency and with excellent qualities.



# LED strip REVAL BULB 120LED 1m 24V 14.4W 405lm 120° IP20 RGB





#### **Product code 17520**

Brand REVAL BULB Supply voltage 24V Output 14.4W Maximum output 14.4W/1m Luminous flux 405lumens Luminaire's efficiency Im79 28W Correlated colour temperature RGB **RGB** Lens angle 120 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Height 2.2mm Width 8.0mm Minimum length 80.0mm Length 1000.0mm In package 5m Work environment indoor use Certificates CE, RoHS Warranty 5 years

This sleek RGB LED strip is a modern addition to any interior, offering versatility and style. With its ability to be cut every 50mm, this LED strip is easy to install, even for first-time users! The strip comes with a self-adhesive backing for quick installation. The specified price is for a 1-meter strip. You can trust in our products, as we sell hundreds of meters of LED strips every day! Send us an inquiry, and we'll provide you with a quote! Illuminate your world with LED House professionals - check out our project portfolio here!







# LED strip REVAL BULB 120LED 1m 24V 2.4W 216lm 120° IP20 930

### Product code 17801

Brand REVAL BULB Supply voltage 24V Output 2.4W Maximum output 2.4W/1m Luminous flux 216lumens Luminaire's efficiency Im79 90W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 2.2mm Width 10.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Certificates UL, CE, RoHS Warranty 5 years







## LED strip REVAL BULB 120LED 1m 24V 28.8W 1040lm 120° IP20 RGB

#### **Product code 13966**

**Brand REVAL BULB** Supply voltage 24V Output 28.8W Maximum output 28.8W/1m Luminous flux 1040lumens Luminaire's efficiency Im79 36W Correlated colour temperature RGB **RGB** Lens angle 120 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Height 3.4mm Width 12.0mm Minimum length 50.0mm Length 1000.0mm Certificates CE, RoHS Warranty 5 years



REVAL BULB 3535 LED strip for creating ambiance in dry indoor spaces! LED diodes have a long lifespan compared to other light sources, reducing maintenance costs and frequent bulb changes. This LED strip adds RGB (red, green, blue) light to the room, making it the perfect tool for creating light effects! The specified price is per meter of the strip.

## LED strip REVAL BULB 120LED 1m 24V 9.6W 270lm 120° IP20 RGB





#### Product code 17519

Brand REVAL BULB Supply voltage 24V Output 9.6W Maximum output 9.6W/1m Luminous flux 270lumens Luminaire's efficiency Im79 28W Correlated colour temperature RGB **RGB** Lens angle 120 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Height 2.2mm Width 5.0mm Minimum length 50.0mm Length 1000.0mm In package 5m Work environment indoor use Certificates CE, RoHS Warranty 5 years

This sleek RGB LED strip is a modern addition to any interior, offering versatility and style. With its ability to be cut every 50mm, this LED strip is easy to install, even for first-time users! The strip comes with a self-adhesive backing for quick installation. The specified price is for a 1-meter strip. You can trust in our products, as we sell hundreds of meters of LED strips every day! Send us an inquiry, and we'll provide you with a quote! Illuminate your world with LED House professionals - check out our project portfolio here!



# LED strip REVAL BULB 120LED 1m 24V 9.6W 837lm 120° IP20 930





#### Product code 16389

Brand REVAL BULB Supply voltage 24V Output 9.6W Maximum output 9.6W/1m Luminous flux 837lumens Luminaire's efficiency Im79 87W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 1.8mm Width 8.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Operation temperature -30°C - 70°C Certificates CE Warranty 5 years

Quality LED strip with 3528 LEDs. An ideal choice for decorative lighting! LED diodes have a long lifespan compared to other light sources, reducing maintenance costs and frequent lamp replacements. This luminaire is suitable for indoor use only, with an IP20 protection rating. The specified price is per 1 meter of strip. There are more meters on the roll, which can be cut according to your needs. You can trust our products as we sell hundreds of meters of LED strips every day! Send us an inquiry, and we will provide you with an offer!







# LED strip REVAL BULB 120LED 1m 8mm wide 24V 14.4W 1500lm 120° IP20 930

### **Product code 17136**

**Brand REVAL BULB** Supply voltage 24V Output 14.4W Maximum output 14.4W/1m Luminous flux 1500lumens Luminaire's efficiency lm79 104W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 8.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Certificates CE, RoHS Warranty 5 years







## LED strip REVAL BULB 120LED 1m 8mm wide 24V 14.4W 1500lm 120° IP20 940

### **Product code 17701**

**Brand REVAL BULB** Supply voltage 24V Output 14.4W Maximum output 14.4W/1m Luminous flux 1500lumens Luminaire's efficiency lm79 104W Correlated colour temperature pure white 4000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 8.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Certificates CE, RoHS Warranty 5 years

High-quality LED strip. 2835 LED diode with good light efficiency and with excellent qualities.



# LED strip REVAL BULB 120LED 1m CC constant current 24V 14.4W 1573lm 120° IP20 930





#### Product code 15036

**Brand REVAL BULB** Supply voltage 24V Output 14.4W Maximum output 14.4W/1m Luminous flux 1573lumens Luminaire's efficiency Im79 109W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 10.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Operation temperature -30 - +45°C Certificates CE,RoHS Warranty 5 years

State-of-the-art LED strip! What makes constant voltage LED strips special? These LED strips regulate the current of LED diodes to remain constant regardless of fluctuations in the power supply voltage. This means that the LED strip always provides uniform current, ensuring consistent illumination along the entire length of the strip. In addition, constant voltage (CC) LED strips can be connected for longer lengths than regular LED strips. For example, with 4.8w/m, it's possible to connect up to 30m from one power source, but for more powerful LEDs, the length decreases. For 14.4w/m LED strip, the length is already 10m. This LED-light with IP20 protection class is an ideal choice for home or office environments. The specified price is per 1 meter of strip. The total length on the roll is 20-50m, which can be cut according to your needs. If you couldn't find a suitable option from our product range, feel free to send an inquiry!







## LED strip REVAL BULB 120LED 1m CC constant current 24V 14.4W 1626lm 120° IP20 960

#### Product code 15170

**Brand REVAL BULB** Supply voltage 24V Output 14.4W Maximum output 14.4W/1m Luminous flux 1626lumens Luminaire's efficiency Im79 113W Correlated colour temperature cold white 6000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 10.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Operation temperature -30 - +45°C Certificates CE, RoHS Warranty 5 years

State-of-the-art LED strip! What makes constant voltage LED strips special? These LED strips regulate the current of LED diodes to remain constant regardless of fluctuations in the power supply voltage. This means that the LED strip always provides uniform current, ensuring consistent illumination along the entire length of the strip. In addition, constant voltage (CC) LED strips can be connected for longer lengths than regular LED strips. For example, with 4.8w/m, it's possible to connect up to 30m from one power source, but for more powerful LEDs, the length decreases. For 14.4w/m LED strip, the length is already 10m. This LED-light with IP20 protection class is an ideal choice for home or office environments. The specified price is per 1 meter of strip. The total length on the roll is 20-50m, which can be cut according to your needs. If you couldn't find a suitable option from our product range, feel free to send an inquiry!







### LED strip REVAL BULB 120LED 1m nano 24V 28.8W 1040lm 120° IP66 RGB

#### Product code 16435

**Brand REVAL BULB** Supply voltage 24V Output 28.8W Maximum output 28.8W/1m Luminous flux 1040lumens Luminaire's efficiency Im79 36W Correlated colour temperature RGB **RGB** Lens angle 120 Sdcm - macadam ellipses 3 Protection class IP66 Lifespan 50000h Height 3.4mm Width 12.0mm Minimum length 50.0mm Length 1000.0mm Certificates CE, RoHS Warranty 5 years



REVAL BULB 3535 LED strip for creating ambiance in dry indoor spaces! LED diodes have a long lifespan compared to other light sources, reducing maintenance costs and frequent bulb changes. This LED strip adds RGB (red, green, blue) light to the room, making it the perfect tool for creating light effects! The specified price is per meter of the strip.

## LED strip REVAL BULB 120LED 1m narrow 24V 9.6W 1000lm 120° IP20 930





#### Product code 15264

Brand REVAL BULB Supply voltage 24V Output 9.6W Maximum output 9.6W/1m Luminous flux 1000lumens Luminaire's efficiency Im79 104W Correlated colour temperature warm white 3000K Lens angle 120 Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Height 1.8mm Width 5.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Certificates CE Warranty 5 years

Make your spaces more eyecatching by using these narrow (5mm) LED strips! This IP20 class LED strip is suitable for creating a cozy atmosphere in dry indoor spaces. The light temperature of the LED strip adds a warm white light (3000K) to the room. LED strips are flexible and can be easily adjusted to different installation needs and surfaces, such as furniture, shelves, stairs, etc. Easy to install even for beginners! The specified price is for 1 meter of strip. You can trust our products because we sell hundreds of meters of LED strips every day! Send us an inquiry, and we will make you an offer!







# LED strip REVAL BULB 120LED 5m in silicone 24V 14.4W 1550lm CRI90 120° IP67 2700K-6000K warm + cold white

#### **Product code 17036**

Brand REVAL BULB Supply voltage 24V Output 14.4W Maximum output 14.4W/1m Luminous flux 1550lumens Luminaire's efficiency Im79 108W Correlated colour temperature warm + cold white 2700K-6000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 6.0mm Width 12.0mm Minimum length 166.7mm Length 5000.0mm Work environment indoor / outdoor Operation temperature -30 - +45°C Certificates CE, RoHS

Waterproof LED strip suitable for outdoor and indoor use. Also suitable for use in the sauna, but not higher than behind the backrest. The life of the LED is reduced if the strip is used in temperatures higher than 70 ° C. We sell by roll.

Warranty 5 years







# LED strip REVAL BULB 120LED 5m silicone 12V 14.4W 1668lm 120° IP67 940

### **Product code 16170**

**Brand REVAL BULB** Supply voltage 12V Output 14.4W Maximum output 14.4W/1m Luminous flux 1668lumens Luminaire's efficiency Im79 116W Correlated colour temperature pure white 4000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 6.0mm Width 10.0mm Minimum length 25.0mm Length 5000.0mm Certificates CE, RoHS Warranty 5 years

Waterproof LED strip suitable for outdoor and indoor use. Also suitable for use in the sauna, but not higher than behind the backrest. The life of the LED is reduced if the strip is used in temperatures higher than 70 ° C. We sell by roll.








# LED strip REVAL BULB 120LED 5m silicone 24V 14.4W 1668lm 120° IP67 940

### **Product code 16214**

**Brand REVAL BULB** Supply voltage 24V Output 14.4W Maximum output 14.4W/1m Luminous flux 1668lumens Luminaire's efficiency Im79 116W Correlated colour temperature pure white 4000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 6.0mm Width 10.0mm Minimum length 25.0mm Length 5000.0mm Certificates CE, RoHS Warranty 5 years









# LED strip REVAL BULB 120LED 5m silicone 24V 9.6W 837lm 120° IP67 930

### Product code 16388

Brand REVAL BULB Supply voltage 24V Output 9.6W Maximum output 9.6W/1m Luminous flux 837lumens Luminaire's efficiency Im79 87W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 5.0mm Width 10.0mm Minimum length 50.0mm Length 5000.0mm Work environment indoor / outdoor Operation temperature -30°C - 70°C

Waterproof LED strip suitable for outdoor and indoor use. Also suitable for use in the sauna, but not higher than behind the backrest. The life of the LED is reduced if the strip is used in temperatures higher than 70 ° C. We sell by roll.

Certificates CE Warranty 5 years







## LED strip REVAL BULB 120LED Küljele 1m 12V 9.6W 750lm 120° IP20 930

#### **Product code 14701**

Warranty 5 years

**Brand REVAL BULB** Supply voltage 12V Output 9.6W Maximum output 9.6W/1m Luminous flux 750lumens Luminaire's efficiency Im79 78W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 3.0mm Width 8.0mm Minimum length 25.0mm Length 1000.0mm Certificates CE, RoHS



Make your spaces more effective by using these LED strips with directional light! This LED strip with IP20 protection class is suitable for creating a cozy atmosphere in dry indoor spaces. LED strips are flexible and can be easily customized to different installation needs and surfaces, such as furniture, shelves, stairs, etc. The specified price is for 1 meter of strip. You can trust our products because we sell hundreds of meters of LED strips every day! Send us an inquiry, and we will make you an offer!





## LED strip REVAL BULB 120LED Side 1m 12V 9.6W 969lm 120° IP20 840

#### **Product code 14154**

**Brand REVAL BULB** Supply voltage 12V Output 9.6W Maximum output 9.6W/1m Luminous flux 969lumens Luminaire's efficiency Im79 101W Correlated colour temperature pure white 4000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Height 3.0mm Width 8.0mm Minimum length 25.0mm Length 1000.0mm Work environment indoor use Certificates CE, RoHS Warranty 5 years



Make your spaces more effective by using these LED strips with directional light! This LED strip with IP20 protection class is suitable for creating a cozy atmosphere in dry indoor spaces. LED strips are flexible and can be easily customized to different installation needs and surfaces, such as furniture, shelves, stairs, etc. The specified price is for 1 meter of strip. You can trust our products because we sell hundreds of meters of LED strips every day! Send us an inquiry, and we will make you an offer!





### **LED strip REVAL BULB 120LED Side 1m NANO 12V 9.6W 969lm 120° IP66 840**

#### **Product code 16183**

**Brand REVAL BULB** Supply voltage 12V Output 9.6W Maximum output 9.6W/1m Luminous flux 969lumens Luminaire's efficiency Im79 101W Correlated colour temperature pure white 4000K Lens angle 120 Cri 80 Sdcm - macadam ellipses 3 Protection class IP66 Lifespan 50000h Height 3.0mm Width 8.0mm Minimum length 25.0mm Length 1000.0mm Work environment indoor use Certificates CE, RoHS Warranty 5 years



Make your spaces more effective by using these LED strips with directional light! This LED strip with IP20 protection class is suitable for creating a cozy atmosphere in dry indoor spaces. LED strips are flexible and can be easily customized to different installation needs and surfaces, such as furniture, shelves, stairs, etc. The specified price is for 1 meter of strip. You can trust our products because we sell hundreds of meters of LED strips every day! Send us an inquiry, and we will make you an offer!





# LED strip REVAL BULB 120LED T 1m 24V 14.4W 1573lm 120° IP20 930

#### **Product code 14678**

**Brand REVAL BULB** Supply voltage 24V Output 14.4W Maximum output 14.4W/1m Luminous flux 1573lumens Luminaire's efficiency Im79 109W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 10.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Operation temperature -20 - +45°C Certificates CE, RoHS Warranty 5 years



Excellent decorative lighting! This luminaire is suitable for indoor use only, with an IP20 protection rating. It adds warm white light (3000K) to the room. LED strips are flexible and can be easily adapted to various installation needs and surfaces, such as furniture, shelves, stairs, etc. Easy to install even for first-time users! The specified price is per 1 meter of strip. The total length on the roll is 5m, which can be cut according to your needs. Cutting is possible every 5cm. You can trust our products as we sell hundreds of meters of LED strips every day! Send us an inquiry, and we will provide you with an offer!





# LED strip REVAL BULB 140LED 1m 24V 14.4W 1840lm 120° IP20 930

### **Product code 14420**

**Brand REVAL BULB** Supply voltage 24V Output 14.4W Maximum output 14.4W/1m Luminous flux 1840lumens Luminaire's efficiency lm79 128W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 10.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Operation temperature -30 - +45°C Certificates CE, RoHS Warranty 5 years







# LED strip REVAL BULB 140LED 1m 24V 14.4W 1950lm 120° IP20 940

### **Product code 14384**

**Brand REVAL BULB** Supply voltage 24V Output 14.4W Maximum output 14.4W/1m Luminous flux 1950lumens Luminaire's efficiency lm79 135W Correlated colour temperature pure white 4000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 10.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Operation temperature -30 - +45°C Certificates CE, RoHS Warranty 5 years







# LED strip REVAL BULB 140LED 1m 24V 14.4W 1950lm 120° IP20 960

### **Product code 14537**

**Brand REVAL BULB** Supply voltage 24V Output 14.4W Maximum output 14.4W/1m Luminous flux 1950lumens Luminaire's efficiency lm79 135W Correlated colour temperature cold white 6000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 10.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Operation temperature -30 - +45°C Certificates CE, RoHS Warranty 5 years







## LED strip REVAL BULB 140LED 1m nano 24V 14.4W 1840lm 120° IP66 930

### **Product code 14422**

**Brand REVAL BULB** Supply voltage 24V Output 14.4W Maximum output 14.4W/1m Luminous flux 1840lumens Luminaire's efficiency lm79 128W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP66 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 10.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Operation temperature -30 - +45°C Certificates CE, RoHS Warranty 5 years







## LED strip REVAL BULB 140LED 1m nano 24V 14.4W 1950lm 120° IP66 860

### **Product code 14547**

**Brand REVAL BULB** Supply voltage 24V Output 14.4W Maximum output 14.4W/1m Luminous flux 1950lumens Luminaire's efficiency lm79 135W Correlated colour temperature cold white 6000K Lens angle 120 Source of light SANAN LED Cri 80 Sdcm - macadam ellipses 3 Protection class IP66 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 10.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Operation temperature -30 - +45°C Certificates CE, RoHS Warranty 5 years







## LED strip REVAL BULB 140LED 1m nano 24V 14.4W 1950lm 120° IP66 940

### **Product code 14669**

**Brand REVAL BULB** Supply voltage 24V Output 14.4W Maximum output 14.4W/1m Luminous flux 1950lumens Luminaire's efficiency lm79 135W Correlated colour temperature pure white 4000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP66 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 10.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Operation temperature -30 - +45°C Certificates CE, RoHS Warranty 5 years







# LED strip REVAL BULB 140LED 5m silicone 24V 14.4W 1600lm 120° IP67 930

### **Product code 14711**

**Brand REVAL BULB** Supply voltage 24V Output 14.4W Maximum output 14.4W/1m Luminous flux 1600lumens Luminaire's efficiency Im79 111W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 6.0mm Width 12.0mm Minimum length 50.0mm Length 5000.0mm Certificates CE, RoHS Warranty 5 years

Waterproof LED strip suitable for outdoor and indoor use. Also suitable for use in the sauna, but not higher than behind the backrest. The life of the LED is reduced if the strip is used in temperatures higher than 70 ° C. We sell by roll.







# LED strip REVAL BULB 160LED 1m 24V 19.2W 2900lm 120° IP20 930

### **Product code 17075**

Brand REVAL BULB Supply voltage 24V Output 19.2W Maximum output 19.2W/1m Luminous flux 2900lumens Luminaire's efficiency lm79 151W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 92 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 1.4mm Width 10.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Certificates UL, CE, RoHS Warranty 5 years







# LED strip REVAL BULB 160LED 1m 24V 19.2W 3000lm 120° IP20 940

### **Product code 17076**

Brand REVAL BULB Supply voltage 24V Output 19.2W Maximum output 19.2W/1m Luminous flux 3000lumens Luminaire's efficiency lm79 156W Correlated colour temperature pure white 4000K Lens angle 120 Source of light SANAN LED Cri 92 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 1.4mm Width 10.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Certificates UL, CE, RoHS Warranty 5 years







# LED strip REVAL BULB 160LED 1m nano 24V 14.4W 300lm 120° IP66 blue

### **Product code 16199**

**Brand REVAL BULB** Supply voltage 24V Output 14.4W Maximum output 14.4W/1m Luminous flux 300lumens Luminaire's efficiency Im79 21W Correlated colour temperature blue blue Lens angle 120 Sdcm - macadam ellipses 3 Protection class IP66 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 1.4mm Width 10.0mm Minimum length 33.3mm Length 5000.0mm Work environment indoor use Certificates CE, RoHS Warranty 5 years

High-quality LED strip. 2835 LED diode with good light efficiency and with excellent qualities.



## LED strip REVAL BULB 160LED 5m in silicone 24V 19.2W 2500lm 120° IP67 930





#### **Product code 18338**

Brand REVAL BULB Supply voltage 24V Output 19.2W Maximum output 19.2W/1m Luminous flux 2500lumens Luminaire's efficiency Im79 130W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 5.2mm Width 12.0mm Minimum length 50.0mm Length 5000.0mm Work environment indoor / outdoor use Certificates UL, CE, RoHS Warranty 5 years

Waterproof LED strip suitable for outdoor and indoor use. Also suitable for use in the sauna, but not higher than behind the backrest. The life of the LED is reduced if the strip is used in temperatures higher than 70 ° C. We sell by roll.







# LED strip REVAL BULB 160LED 5m in silicone 24V 19.2W 2500lm 120° IP67 940

### **Product code 17958**

**Brand REVAL BULB** Supply voltage 24V Output 19.2W Maximum output 19.2W/1m Luminous flux 2500lumens Luminaire's efficiency Im79 130W Correlated colour temperature pure white 4000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 5.2mm Width 12.0mm Minimum length 50.0mm Length 5000.0mm Work environment indoor / outdoor Certificates UL, CE, RoHS Warranty 5 years

Waterproof LED strip suitable for outdoor and indoor use. Also suitable for use in the sauna, but not higher than behind the backrest. The life of the LED is reduced if the strip is used in temperatures higher than 70 ° C. We sell by roll.









# LED strip REVAL BULB 160LED 5m silicone 24V 14.4W 300lm 120° IP67 blue

### **Product code 17175**

**Brand REVAL BULB** Supply voltage 24V Output 14.4W Maximum output 14.4W/1m Luminous flux 300lumens Luminaire's efficiency Im79 21W Correlated colour temperature blue blue Lens angle 120 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Height 6.0mm Width 12.5mm Minimum length 33.3mm Length 5000.0mm Work environment indoor / outdoor use Certificates CE, RoHS Warranty 5 years









# LED strip REVAL BULB 168LED 1m 24V 17.3W 2336lm 120° IP20 940

### **Product code 14644**

**Brand REVAL BULB** Supply voltage 24V Output 17.3W Maximum output 17.3W/1m Luminous flux 2336lumens Luminaire's efficiency lm79 135W Correlated colour temperature pure white 4000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 10.0mm Minimum length 40.0mm Length 1000.0mm Work environment indoor use Operation temperature -30 - +45°C Certificates CE, RoHS Warranty 5 years







# LED strip REVAL BULB 224LED 1m 24V 20.2W 2900lm 120° IP20 940

### **Product code 14809**

**Brand REVAL BULB** Supply voltage 24V Output 20.2W Maximum output 20.2W/1m Luminous flux 2900lumens Luminaire's efficiency lm79 144W Correlated colour temperature pure white 4000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 10.0mm Minimum length 35.7mm Length 1000.0mm Work environment indoor use Operation temperature -30 - +45°C Certificates CE, RoHS Warranty 5 years







# LED strip REVAL BULB 224LED 1m 24V 20.2W 2937lm 120° IP20 930

### **Product code 14348**

**Brand REVAL BULB** Supply voltage 24V Output 20.2W Maximum output 20.2W/1m Luminous flux 2937lumens Luminaire's efficiency lm79 145W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 10.0mm Minimum length 35.7mm Length 1000.0mm Work environment indoor use Operation temperature -30 - +45°C Certificates CE, RoHS Warranty 5 years







# LED strip REVAL BULB 224LED 1m 24V 20.2W 3114lm 120° IP20 960

### **Product code 14947**

**Brand REVAL BULB** Supply voltage 24V Output 20.2W Maximum output 20.2W/1m Luminous flux 3114lumens Luminaire's efficiency lm79 154W Correlated colour temperature cold white 6000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 10.0mm Minimum length 35.7mm Length 1000.0mm Work environment indoor use Operation temperature -30 - +45°C Certificates CE, RoHS Warranty 5 years







# LED strip REVAL BULB 240LED 1m 24V 19.2W 482lm 120° IP20 blue

### **Product code 15153**

Brand REVAL BULB Supply voltage 24V Output 19.2W Maximum output 19.2W/1m Luminous flux 482lumens Luminaire's efficiency Im79 25W Correlated colour temperature blue blue Lens angle 120 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 1.4mm Width 10.0mm Minimum length 25.0mm Length 5000.0mm Work environment indoor use Certificates CE, RoHS Warranty 5 years







# LED strip REVAL BULB 240LED 1m 24V 23W 3100lm 120° IP20 930

### **Product code 17077**

Brand REVAL BULB Supply voltage 24V Output 23W Maximum output 23W/1m Luminous flux 3100lumens Luminaire's efficiency lm79 135W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 92 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 1.4mm Width 10.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Certificates UL, CE, RoHS Warranty 5 years







### LED strip REVAL BULB 240LED 1m 24V 23W 3200lm 120° IP20 940

### **Product code 17078**

Brand REVAL BULB Supply voltage 24V Output 23W Maximum output 23W/1m Luminous flux 3200lumens Luminaire's efficiency lm79 139W Correlated colour temperature pure white 4000K Lens angle 120 Source of light SANAN LED Cri 92 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 1.4mm Width 10.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Certificates UL, CE, RoHS Warranty 5 years







### LED strip REVAL BULB 240LED 1m Cuttable after each LED 24V 14.4W 1550lm 120° IP20 930

### Product code 18276

**Brand REVAL BULB** Supply voltage 24V Output 14.4W Maximum output 14.4W/1m Luminous flux 1550lumens Luminaire's efficiency lm79 108W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 2.5mm Width 8.0mm Minimum length 6.3mm Length 1000.0mm Work environment indoor use Operation temperature -30 - +45°C Certificates CE, RoHS Warranty 5 years







### LED strip REVAL BULB 240LED 1m Cuttable after each LED 24V 14.4W 1700lm 120° IP20 940

### **Product code 18277**

**Brand REVAL BULB** Supply voltage 24V Output 14.4W Maximum output 14.4W/1m Luminous flux 1700lumens Luminaire's efficiency lm79 118W Correlated colour temperature pure white 4000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 2.5mm Width 8.0mm Minimum length 6.3mm Length 1000.0mm Work environment indoor use Operation temperature -30 - +45°C Certificates CE, RoHS Warranty 5 years







### LED strip REVAL BULB 288LED 1m 24V 40W 5400lm CRI90 120° IP20 1800K-6500K warm + cold white

#### **Product code 18236**

**Brand REVAL BULB** Supply voltage 24V Power factor 0.90 Output 40W Maximum output 40W/1m Luminous flux 5400lumens Luminaire's efficiency lm79 135W Correlated colour temperature warm + cold white 1800K-6500K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 2.2mm Width 14.0mm Minimum length 55.6mm Length 1000.0mm In package 1m Work environment indoor use Certificates UL, CE, RoHS Warranty 5 years

### LED strip REVAL BULB 30LED 1m 12V 7.2W 260lm 120° IP20 RGB



50/129 26.08.2025

#### **Product code 12666**

Brand REVAL BULB Supply voltage 12V Output 7.2W Maximum output 7.2W/1m Luminous flux 260lumens Luminaire's efficiency Im79 36W Correlated colour temperature RGB **RGB** Lens angle 120 Source of light SANAN LED Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 2.1mm Width 10.0mm Minimum length 100.0mm Length 1000.0mm In package 5m Work environment indoor use Certificates CE, RoHS Warranty 5 years

This colorful **LED** strip is perfect for creating a cozy atmosphere in dry indoor spaces. The strip can be extended by soldering. You can connect a maximum of 7-8 meters to one power supply unit. The back side of the strip has 3M double-sided tape, making installation particularly convenient. For best durability and heat dissipation, we recommend installing it with an aluminum profile. The specified price is per meter of the strip. This product requires a power supply unit to operate. You can also find it in the LED house product range!











# LED strip REVAL BULB 30LED 5m roll silicon 12V 7.2W 260lm 120° IP67 RGB

### **Product code 13009**

Brand REVAL BULB Supply voltage 12V Output 7.2W Maximum output 7.2W/1m Luminous flux 260lumens Luminaire's efficiency Im79 36W Correlated colour temperature RGB **RGB** Lens angle 120 Source of light SANAN LED Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 5.0mm Width 12.0mm Minimum length 100.0mm Length 5000.0mm Certificates CE, RoHS Warranty 5 years



Waterproof LED strip suitable for outdoor and indoor use. Also suitable for use in the sauna, but not higher than behind the backrest. The life of the LED is reduced if the strip is used in temperatures higher than 70 ° C. We sell by 5m roll.





# LED strip REVAL BULB 320LED 1m 24V 24W 3500lm 120° IP20 930

### **Product code 17347**

Brand REVAL BULB Supply voltage 24V Output 24W Maximum output 24W/1m Luminous flux 3500lumens Luminaire's efficiency Im79 146W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 92 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 2.5mm Width 10.0mm Minimum length 25.0mm Length 1000.0mm Work environment indoor use Certificates UL, CE, RoHS Warranty 5 years







### LED strip REVAL BULB 320LED 1m 24V 24W 3600lm 120° IP20 940

### **Product code 17348**

Brand REVAL BULB Supply voltage 24V Output 24W Maximum output 24W/1m Luminous flux 3600lumens Luminaire's efficiency lm79 150W Correlated colour temperature pure white 4000K Lens angle 120 Source of light SANAN LED Cri 92 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 2.5mm Width 10.0mm Minimum length 25.0mm Length 1000.0mm Work environment indoor use Certificates UL, CE, RoHS Warranty 5 years







# LED strip REVAL BULB 320LED 1m 24V 31W 3900lm 120° IP20 930

### **Product code 17797**

Brand REVAL BULB Supply voltage 24V Output 31W Maximum output 31W/1m Luminous flux 3900lumens Luminaire's efficiency Im79 126W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 2.5mm Width 10.0mm Minimum length 25.0mm Length 1000.0mm Work environment indoor use Certificates UL, CE, RoHS Warranty 5 years







# LED strip REVAL BULB 320LED 1m 24V 31W 4000lm 120° IP20 940

### **Product code 17798**

Brand REVAL BULB Supply voltage 24V Output 31W Maximum output 31W/1m Luminous flux 4000lumens Luminaire's efficiency lm79 129W Correlated colour temperature pure white 4000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 2.5mm Width 10.0mm Minimum length 25.0mm Length 1000.0mm Work environment indoor use Certificates UL, CE, RoHS Warranty 5 years







# LED strip REVAL BULB 320LED 5m in silicone 24V 31W 3900lm 120° IP67 930

### **Product code 17800**

Brand REVAL BULB Supply voltage 24V Output 31W Maximum output 31W/1m Luminous flux 3900lumens Luminaire's efficiency Im79 126W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 5.2mm Width 10.0mm Minimum length 25.0mm Length 5000.0mm Work environment indoor / outdoor Certificates UL, CE, RoHS

Waterproof LED strip suitable for outdoor and indoor use. Also suitable for use in the sauna, but not higher than behind the backrest. The life of the LED is reduced if the strip is used in temperatures higher than 70 ° C. We sell by roll.

Warranty 5 years








### LED strip REVAL BULB 320LED 5m in silicone 24V 31W 4000lm 120° IP67 940

### **Product code 17799**

Brand REVAL BULB Supply voltage 24V Output 31W Maximum output 31W/1m Luminous flux 4000lumens Luminaire's efficiency lm79 129W Correlated colour temperature pure white 4000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 5.2mm Width 10.0mm Minimum length 25.0mm Length 5000.0mm Work environment indoor / outdoor Certificates UL, CE, RoHS Warranty 5 years

Waterproof LED strip suitable for outdoor and indoor use. Also suitable for use in the sauna, but not higher than behind the backrest. The life of the LED is reduced if the strip is used in temperatures higher than 70 ° C. We sell by roll.







### LED strip REVAL BULB 60LED 10m roll silicon 24V 14.4W 520lm 120° IP67 RGB

#### **Product code 16384**

Brand REVAL BULB Supply voltage 24V Output 14.4W Maximum output 14.4W/1m Luminous flux 520lumens Luminaire's efficiency Im79 36W Correlated colour temperature RGB **RGB** Lens angle 120 Source of light SANAN LED Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 3.0mm Width 12.0mm Minimum length 100.0mm Length 10000.0mm Certificates CE, RoHS Warranty 5 years



Waterproof LED strip suitable for outdoor and indoor use. Also suitable for use in the sauna, but not higher than behind the backrest. The life of the LED is reduced if the strip is used in temperatures higher than 70 ° C. We sell by 5m roll.

### LED strip REVAL BULB 60LED 1m 12V 14.4W 520lm 120° IP20 RGB



59/129 26.08.2025

#### **Product code 12780**

Brand REVAL BULB Supply voltage 12V Output 14.4W Maximum output 14.4W/1m Luminous flux 520lumens Luminaire's efficiency Im79 36W Correlated colour temperature RGB **RGB** Lens angle 120 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Height 2.1mm Width 10.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Certificates CE, RoHS Warranty 5 years

This colorful LED strip is perfect for creating a cozy atmosphere in dry indoor spaces. The strip can be extended by soldering. You can connect a maximum of 7-8 meters to one power supply unit. The back side of the strip has 3M double-sided tape, making installation particularly convenient. For best durability and heat dissipation, we recommend installing it with an aluminum profile. The specified price is per meter of the strip. This product requires a power supply unit to operate. You can also find it in the LED house product range!











# LED strip REVAL BULB 60LED 1m 12V 4.8W 315lm 120° IP20 green

#### Product code 13031

Warranty 5 years

Brand REVAL BULB Supply voltage 12V Output 4.8W Maximum output 4.8W/1m Luminous flux 315lumens Luminaire's efficiency Im79 66W Correlated colour temperature green green Lens angle 120 Source of light SANAN LED Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 1.8mm Width 8.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Certificates CE, RoHS







# LED strip REVAL BULB 60LED 1m 12V 4.8W 38Im 120° IP20 yellow

#### **Product code 12857**

**Brand REVAL BULB** Supply voltage 12V Output 4.8W Maximum output 4.8W/1m Luminous flux 38lumens Luminaire's efficiency Im79 8W Correlated colour temperature yellow vellow Lens angle 120 Source of light SANAN LED Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 1.8mm Width 8.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Certificates CE, RoHS Warranty 5 years







### LED strip REVAL BULB 60LED 1m 12V 4.8W 398lm 120° IP20 927

#### **Product code 16471**

Warranty 5 years

**Brand REVAL BULB** Supply voltage 12V Output 4.8W Maximum output 4.8W/1m Luminous flux 398lumens Luminaire's efficiency Im79 83W Correlated colour temperature warm white 2700K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 1.8mm Width 8.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Certificates CE, RoHS







### LED strip REVAL BULB 60LED 1m 12V 4.8W 418lm 120° IP20 930

#### **Product code 12785**

**Brand REVAL BULB** Supply voltage 12V Output 4.8W Maximum output 4.8W/1m Luminous flux 418lumens Luminaire's efficiency Im79 87W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 1.8mm Width 8.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Certificates CE, RoHS Warranty 5 years







### LED strip REVAL BULB 60LED 1m 12V 4.8W 450lm 120° IP20 960

#### **Product code 12786**

**Brand REVAL BULB** Supply voltage 12V Output 4.8W Maximum output 4.8W/1m Luminous flux 450lumens Luminaire's efficiency Im79 94W Correlated colour temperature cold white 6000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 1.8mm Width 8.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Certificates CE, RoHS Warranty 5 years







### LED strip REVAL BULB 60LED 1m 12V 4.8W 452lm 120° IP20 940

#### **Product code 13629**

Brand REVAL BULB Supply voltage 12V Output 4.8W Maximum output 4.8W/1m Luminous flux 452lumens Luminaire's efficiency Im79 94W Correlated colour temperature pure white 4000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 1.8mm Width 8.0mm Minimum length 50.0mm Length 10000.0mm Work environment indoor use Certificates CE, RoHS Warranty 5 years







### LED strip REVAL BULB 60LED 1m 12V 4.8W 55lm 120° IP20 red

#### Product code 13029

Brand REVAL BULB Supply voltage 12V Output 4.8W Maximum output 4.8W/1m Luminous flux 55lumens Luminaire's efficiency Im79 11W Correlated colour temperature red red Lens angle 120 Source of light SANAN LED Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 1.8mm Width 8.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Certificates CE, RoHS Warranty 5 years







### LED strip REVAL BULB 60LED 1m 12V 4.8W 80lm 120° IP20 blue

### **Product code 13030**

**Brand REVAL BULB** Supply voltage 12V Output 4.8W Maximum output 4.8W/1m Luminous flux 80lumens Luminaire's efficiency Im79 17W Correlated colour temperature blue blue Lens angle 120 Source of light SANAN LED Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 1.8mm Width 8.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Certificates CE. RoHS Warranty 5 years







### LED strip REVAL BULB 60LED 1m 12V 7.2W 830lm 120° IP20 830

#### **Product code 13868**

Brand REVAL BULB Supply voltage 12V Output 7.2W Maximum output 7.2W/1m Luminous flux 830lumens Luminaire's efficiency lm79 115W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 80 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 1.4mm Width 8.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Operation temperature -20 - +45°C Certificates CE, RoHS Warranty 5 years







# LED strip REVAL BULB 60LED 1m 12V 7.2W 830lm 120° IP20 940

### **Product code 14324**

Brand REVAL BULB Supply voltage 12V Output 7.2W Maximum output 7.2W/1m Luminous flux 830lumens Luminaire's efficiency lm79 115W Correlated colour temperature pure white 4000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 8.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Certificates CE, RoHS Warranty 5 years







### LED strip REVAL BULB 60LED 1m 12V 7.2W 830lm 120° IP20 960

#### **Product code 14325**

**Brand REVAL BULB** Supply voltage 12V Output 7.2W Maximum output 7.2W/1m Luminous flux 830lumens Luminaire's efficiency lm79 115W Correlated colour temperature cold white 6000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 8.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Operation temperature -20 - +45°C Certificates CE, RoHS Warranty 5 years

High-quality LED strip. 2835 LED diode with good light efficiency and with excellent qualities.



# LED strip REVAL BULB 60LED 1m 24V 14.4W 520lm 120° IP20 RGB



71/129 26.08.2025

#### **Product code 16410**


Brand REVAL BULB Supply voltage 24V Output 14.4W Maximum output 14.4W/1m Luminous flux 520lumens Luminaire's efficiency Im79 36W Correlated colour temperature RGB **RGB** Lens angle 120 Source of light SANAN LED Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 3.0mm Width 10.0mm Minimum length 100.0mm Length 1000.0mm Certificates CE, RoHS Warranty 5 years

This colorful **LED** strip is perfect for creating a cozy atmosphere in dry indoor spaces. The strip can be extended by soldering. You can connect a maximum of 7-8 meters to one power supply unit. The back side of the strip has 3M double-sided tape, making installation particularly convenient. For best durability and heat dissipation, we recommend installing it with an aluminum profile. The specified price is per meter of the strip. This product requires a power supply unit to operate. You can also find it in the LED house product range!











### LED strip REVAL BULB 60LED 1m 24V 14.4W 520lm 120° IP20 RGB

#### **Product code 15186**

Brand REVAL BULB Supply voltage 24V Output 14.4W Maximum output 14.4W/1m Luminous flux 520lumens Luminaire's efficiency Im79 36W Correlated colour temperature RGB RGB Lens angle 120 Sdcm - macadam ellipses 3 Protection class IP20 Height 4.0mm Width 12.0mm Minimum length 100.0mm Length 1000.0mm Certificates CE, RoHS



for creating light effects! The specified

price is per meter of the strip.



# LED strip REVAL BULB 60LED 1m 24V 14.4W 520lm 120° IP20 RGB



73/129 26.08.2025

#### **Product code 14588**

Brand REVAL BULB Supply voltage 24V Output 14.4W Maximum output 14.4W/1m Luminous flux 520lumens Luminaire's efficiency Im79 36W Correlated colour temperature RGB **RGB** Lens angle 120 Source of light SANAN LED Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 3.0mm Width 10.0mm Minimum length 100.0mm Length 1000.0mm Certificates CE, RoHS Warranty 5 years

This colorful **LED** strip is perfect for creating a cozy atmosphere in dry indoor spaces. The strip can be extended by soldering. You can connect a maximum of 7-8 meters to one power supply unit. The back side of the strip has 3M double-sided tape, making installation particularly convenient. For best durability and heat dissipation, we recommend installing it with an aluminum profile. The specified price is per meter of the strip. This product requires a power supply unit to operate. You can also find it in the LED house product range!








LED strip REVAL BULB 60LED 1m 24V 19.2W 370lm CRI80 120° IP20 RGB + 3000K RGBW warm





#### Product code 13447

Brand REVAL BULB Supply voltage 24V Output 19.2W Maximum output 19.2W/1m Luminous flux 370lumens Luminaire's efficiency Im79 19W Correlated colour temperature RGBW warm RGB + 3000K Lens angle 120 Source of light SANAN LED Cri 80 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 3.0mm Width 12.0mm Minimum length 100.0mm Length 1000.0mm In package 5m Work environment indoor use Certificates CE, RoHS Warranty 5 years

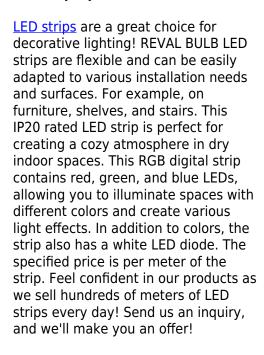







# LED strip REVAL BULB 60LED 1m 24V 19.2W 380lm CRI80 120° IP20 RGB+4000K RGBW pure white

#### Product code 15020

**Brand REVAL BULB** Supply voltage 24V Output 19.2W Maximum output 19.2W/1m Luminous flux 380lumens Luminaire's efficiency Im79 20W Correlated colour temperature RGBW pure white RGB+4000K Lens angle 120 Source of light SANAN LED Cri 80 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 2.1mm Width 12.0mm Minimum length 100.0mm Length 1000.0mm In package 5m Work environment indoor use Certificates CE, RoHS Warranty 5 years

LED strips are a great choice for decorative lighting! REVAL BULB LED strips are flexible and can be easily adapted to various installation needs and surfaces. For example, on furniture, shelves, and stairs. This IP20 rated LED strip is perfect for creating a cozy atmosphere in dry indoor spaces. This RGB digital strip contains red, green, and blue LEDs, allowing you to illuminate spaces with different colors and create various light effects. In addition to colors, the strip also has a white LED diode. The specified price is per meter of the strip. Feel confident in our products as we sell hundreds of meters of LED strips every day! Send us an inquiry, and we'll make you an offer!







### LED strip REVAL BULB 60LED 1m 24V 19.2W 390lm CRI80 120° IP20 RGB + 6000K RGBW cold

#### Product code 13446

**Brand REVAL BULB** Supply voltage 24V Output 19.2W Maximum output 19.2W/1m Luminous flux 390lumens Luminaire's efficiency Im79 20W Correlated colour temperature RGBW cold RGB + 6000K Lens angle 120 Source of light SANAN LED Cri 80 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 3.0mm Width 12.0mm Minimum length 100.0mm Length 1000.0mm In package 5m Work environment indoor use Certificates CE, RoHS Warranty 5 years

LED strips are a great choice for decorative lighting! REVAL BULB LED strips are flexible and can be easily adapted to various installation needs and surfaces. For example, on furniture, shelves, and stairs. This IP20 rated LED strip is perfect for creating a cozy atmosphere in dry indoor spaces. This RGB digital strip contains red, green, and blue LEDs, allowing you to illuminate spaces with different colors and create various light effects. In addition to colors, the strip also has a white LED diode. The specified price is per meter of the strip. Feel confident in our products as we sell hundreds of meters of LED strips every day! Send us an inquiry, and we'll make you an offer!







### LED strip REVAL BULB 60LED 1m 24V 4.8W 418lm 120° IP20 930

#### Product code 17061

**Brand REVAL BULB** Supply voltage 24V Output 4.8W Maximum output 4.8W/1m Luminous flux 418lumens Luminaire's efficiency Im79 87W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.8mm Width 8.0mm Minimum length 100.0mm Length 1000.0mm Work environment indoor use Certificates CE, RoHS Warranty 5 years



Quality LED strip with 3528 LEDs. An ideal choice for decorative lighting! LED diodes have a long lifespan compared to other light sources, reducing maintenance costs and frequent lamp replacements. This luminaire is suitable for indoor use only, with an IP20 protection rating. The specified price is per 1 meter of strip. There are more meters on the roll, which can be cut according to your needs. You can trust our products as we sell hundreds of meters of LED strips every day! Send us an inquiry, and we will provide you with an offer!





### LED strip REVAL BULB 60LED 1m 24V 7.2W 750lm 120° IP20 927

#### **Product code 16386**

Brand REVAL BULB Supply voltage 24V Output 7.2W Maximum output 7.2W/1m Luminous flux 750lumens Luminaire's efficiency lm79 104W Correlated colour temperature warm white 2700K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 8.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Operation temperature -20 - +45°C Certificates CE, RoHS Warranty 5 years







## LED strip REVAL BULB 60LED 1m 24V 7.2W 830lm 120° IP20 830

#### **Product code 16213**

Brand REVAL BULB Supply voltage 24V Output 7.2W Maximum output 7.2W/1m Luminous flux 830lumens Luminaire's efficiency lm79 115W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 80 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 8.0mm Minimum length 100.0mm Length 1000.0mm Work environment indoor use Operation temperature -20 - +45°C Certificates CE, RoHS Warranty 5 years







### LED strip REVAL BULB 60LED 1m 24V 7.2W 840lm 120° IP20 940

#### **Product code 17102**

Brand REVAL BULB Supply voltage 24V Output 7.2W Maximum output 7.2W/1m Luminous flux 840lumens Luminaire's efficiency lm79 117W Correlated colour temperature pure white 4000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 8.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Operation temperature -20 - +45°C Certificates CE, RoHS Warranty 5 years







### LED strip REVAL BULB 60LED 1m Flexible 12V 7.2W 700lm 120° IP20 830

#### **Product code 13683**

**Brand REVAL BULB** Supply voltage 12V Output 7.2W Maximum output 7.2W/1m Luminous flux 700lumens Luminaire's efficiency Im79 97W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 80 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 1.4mm Width 8.0mm Minimum length 50.0mm Length 1000.0mm Certificates CE, RoHS



This flexible LED strip is an ideal detail to make rooms more distinctive! The LED strip can be bent at an angle, and thanks to this feature, the installation process is particularly easy - achievable even for a novice! The specified price is for 1 meter of strip. You can trust our products because we sell hundreds of meters of LED strips every day! Send us an inquiry, and we will make you an offer!

Warranty 5 years





## LED strip REVAL BULB 60LED 5m roll silicon 24V 14.4W 520lm 120° IP67 RGB

#### **Product code 15675**

**Brand REVAL BULB** Supply voltage 24V Output 14.4W Maximum output 14.4W/1m Luminous flux 520lumens Luminaire's efficiency Im79 36W Correlated colour temperature RGB **RGB** Lens angle 120 Source of light SANAN LED Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 3.0mm Width 12.0mm Minimum length 100.0mm Length 5000.0mm Certificates CE, RoHS Warranty 5 years



Waterproof LED strip suitable for outdoor and indoor use. Also suitable for use in the sauna, but not higher than behind the backrest. The life of the LED is reduced if the strip is used in temperatures higher than 70 ° C. We sell by 5m roll.





### LED strip REVAL BULB 60LED 5m roll silicon 24V 19.2W 370lm CRI90 120° IP67 RGB + 3000K RGBW warm

#### **Product code 15503**

**Brand REVAL BULB** Supply voltage 24V Output 19.2W Maximum output 19.2W/1m Luminous flux 370lumens Luminaire's efficiency lm79 19W Correlated colour temperature RGBW warm RGB + 3000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 5.0mm Width 15.0mm Minimum length 100.0mm Length 5000.0mm Certificates CE, RoHS, UL Warranty 5 years

Waterproof LED strip suitable for outdoor and indoor use. Also suitable for use in the sauna, but not higher than behind the backrest. The life of the LED is reduced if the strip is used in temperatures higher than 70 ° C. We sell by 5m roll.







### LED strip REVAL BULB 60LED 5m silicone 12V 4.8W 413lm 120° IP67 960

#### **Product code 13074**

Brand REVAL BULB Supply voltage 12V Output 4.8W Maximum output 4.8W/1m Luminous flux 413lumens Luminaire's efficiency Im79 86W Correlated colour temperature cold white 6000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 5.0mm Width 10.0mm Minimum length 50.0mm Length 5000.0mm Work environment indoor / outdoor Operation temperature -30°C - 70°C Certificates CE Warranty 5 years

Waterproof LED strip suitable for outdoor and indoor use. Also suitable for use in the sauna, but not higher than behind the backrest. The life of the LED is reduced if the strip is used in temperatures higher than 70 ° C. We sell by roll.







### LED strip REVAL BULB 60LED 5m silicone 12V 4.8W 438lm 120° IP67 940

#### **Product code 13926**

**Brand REVAL BULB** Supply voltage 12V Output 4.8W Maximum output 4.8W/1m Luminous flux 438lumens Luminaire's efficiency Im79 91W Correlated colour temperature pure white 4000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 5.0mm Width 10.0mm Minimum length 50.0mm Length 5000.0mm Work environment indoor / outdoor Operation temperature -30°C - 70°C Certificates CE

Waterproof LED strip suitable for outdoor and indoor use. Also suitable for use in the sauna, but not higher than behind the backrest. The life of the LED is reduced if the strip is used in temperatures higher than 70 ° C. We sell by roll.

Warranty 5 years







## LED strip REVAL BULB 60LED 5m silicone 12V 7.2W 600lm 120° IP67 930

#### **Product code 13869**

Brand REVAL BULB Supply voltage 12V Output 7.2W Maximum output 7.2W/1m Luminous flux 600lumens Luminaire's efficiency Im79 83W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 6.0mm Width 10.0mm Minimum length 50.0mm Length 5000.0mm Certificates CE, RoHS Warranty 5 years

Waterproof LED strip suitable for outdoor and indoor use. Also suitable for use in the sauna, but not higher than behind the backrest. The life of the LED is reduced if the strip is used in temperatures higher than 70 ° C. We sell by roll.







## LED strip REVAL BULB 60LED 5m silicone 24V 4.8W 400lm 120° IP67 927

#### **Product code 16963**

**Brand REVAL BULB** Supply voltage 24V Output 4.8W Maximum output 4.8W/1m Luminous flux 400lumens Luminaire's efficiency Im79 83W Correlated colour temperature warm white 2700K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 5.0mm Width 10.0mm Minimum length 100.0mm Length 5000.0mm Work environment indoor / outdoor Operation temperature -30°C - 70°C Certificates CE

Waterproof LED strip suitable for outdoor and indoor use. Also suitable for use in the sauna, but not higher than behind the backrest. The life of the LED is reduced if the strip is used in temperatures higher than 70 ° C. We sell by roll.

Warranty 5 years







### LED strip REVAL BULB 60LED 5m silicone 24V 4.8W 400lm 120° IP67 930

#### **Product code 17173**

**Brand REVAL BULB** Supply voltage 24V Output 4.8W Maximum output 4.8W/1m Luminous flux 400lumens Luminaire's efficiency Im79 83W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 5.0mm Width 10.0mm Minimum length 50.0mm Length 5000.0mm Work environment indoor / outdoor Operation temperature -30°C - 70°C Certificates CE

Waterproof LED strip suitable for outdoor and indoor use. Also suitable for use in the sauna, but not higher than behind the backrest. The life of the LED is reduced if the strip is used in temperatures higher than 70 ° C. We sell by roll.

Warranty 5 years







### LED strip REVAL BULB 60LED 5m silicone 24V 7.2W 600lm 120° IP67 930

#### **Product code 15226**

Brand REVAL BULB Supply voltage 24V Output 7.2W Maximum output 7.2W/1m Luminous flux 600lumens Luminaire's efficiency Im79 83W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 25000h Llmf tm21 L70B50 @25°C 50.000h Height 6.0mm Width 10.0mm Minimum length 100.0mm Length 5000.0mm Certificates CE, RoHS Warranty 5 years

Waterproof LED strip suitable for outdoor and indoor use. Also suitable for use in the sauna, but not higher than behind the backrest. The life of the LED is reduced if the strip is used in temperatures higher than 70 ° C. We sell by roll.







### LED strip REVAL BULB 60LED 5m silicone 24V 7.2W 830lm 120° IP67 940

#### Product code 16861

**Brand REVAL BULB** Supply voltage 24V Output 7.2W Maximum output 7.2W/1m Luminous flux 830lumens Luminaire's efficiency Im79 115W Correlated colour temperature pure white 4000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 6.0mm Width 10.0mm Minimum length 50.0mm Length 5000.0mm Certificates CE, RoHS Warranty 5 years



Waterproof LED strip suitable for outdoor and indoor use. Also suitable for use in the sauna, but not higher than behind the backrest. The life of the LED is reduced if the strip is used in temperatures higher than 70 ° C. We sell by roll.

# LED strip REVAL BULB 60LED 5m silicone coated 12V 4.8W 38lm 120° IP55 yellow





#### **Product code 13397**

Brand REVAL BULB Supply voltage 12V Output 4.8W Maximum output 4.8W/1m Luminous flux 38lumens Luminaire's efficiency Im79 8W Correlated colour temperature yellow yellow Lens angle 120 Source of light SANAN LED Sdcm - macadam ellipses 3 Protection class IP55 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 3.0mm Width 8.0mm Minimum length 50.0mm Length 5000.0mm Certificates CE Warranty 5 years



Waterproof silicone-coated **LED strip** suitable for damp environments. This product is sold in 5-meter rolls. The strip can be cut every 3 LEDs at intervals of 3 cm. It can be extended by soldering. A maximum of 7-8 meters of the strip can be connected to one power supply unit. Installation is made easy with 3M double-sided tape on the back of the LED strip. For best durability and heat dissipation, we recommend installing it with an aluminum profile. A power supply unit is required for operation, which can also be found in the LED House product range.






### LED strip REVAL BULB 60LED 5m silicone coated 12V 4.8W 480lm 120° IP55 960

#### **Product code 12645**

Brand REVAL BULB Supply voltage 12V Output 4.8W Maximum output 4.8W/1m Luminous flux 480lumens Luminaire's efficiency lm79 100W Correlated colour temperature cold white 6000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP55 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 3.0mm Width 8.0mm Minimum length 50.0mm Length 5000.0mm Warranty 5 years



product range.








### LED strip REVAL BULB 60LED CC 10m silicone 24V 7.2W 787lm 120° IP67 930

#### **Product code 16817**

**Brand REVAL BULB** Supply voltage 24V Output 7.2W Maximum output 7.2W/1m Luminous flux 787lumens Luminaire's efficiency Im79 109W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 6.0mm Width 10.0mm Minimum length 100.0mm Length 10000.0mm Certificates CE, RoHS Warranty 5 years

the LED is reduced if the strip is used in temperatures higher than 70 ° C.

We sell by roll.





### LED strip REVAL BULB 72LED 1m NANO 24V 17.3W 620lm 120° IP66 RGB





#### Product code 15021

Brand REVAL BULB Supply voltage 24V Output 17.3W Maximum output 17.3W/1m Luminous flux 620lumens Luminaire's efficiency Im79 36W Correlated colour temperature RGB **RGB** Lens angle 120 Source of light SANAN LED Sdcm - macadam ellipses 3 Protection class IP66 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 3.0mm Width 10.0mm Minimum length 83.3mm Length 1000.0mm Certificates CE, RoHS Warranty 5 years



High-quality and durable nano-coated RGB LED strip with IP66 protection rating, allowing the LED strip to be used both outdoors and indoors. This RGB LED strip offers a wide range of colors, including various shades that can be adjusted according to user preferences or the situation. LED strips are flexible and can be easily adapted to various installation needs and surfaces, such as furniture, shelves, stairs, etc. You can be confident in our products as we sell hundreds of meters of LED strips every day! Send us an inquiry, and we will make you an offer!





## LED strip REVAL BULB 72LED 5m roll silicon 24V 17.3W 620lm 120° IP67 RGB

#### Product code 15322

Brand REVAL BULB Supply voltage 24V Output 17.3W Maximum output 17.3W/1m Luminous flux 620lumens Luminaire's efficiency Im79 36W Correlated colour temperature RGB **RGB** Lens angle 120 Source of light SANAN LED Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Height 3.0mm Width 12.0mm Minimum length 83.3mm Length 5000.0mm Certificates CE, RoHS Warranty 5 years



Waterproof LED strip suitable for outdoor and indoor use. Also suitable for use in the sauna, but not higher than behind the backrest. The life of the LED is reduced if the strip is used in temperatures higher than 70 ° C. We sell by 5m roll.





### LED strip REVAL BULB 98LED 1m 24V 10W 1199lm 120° IP20 927

#### **Product code 16387**

Brand REVAL BULB Supply voltage 24V Output 10W Maximum output 10W/1m Luminous flux 1199lumens Luminaire's efficiency lm79 120W Correlated colour temperature warm white 2700K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 8.0mm Minimum length 71.4mm Length 1000.0mm Work environment indoor use Certificates CE, RoHS Warranty 5 years







### LED strip REVAL BULB 98LED 1m 24V 10W 1285lm 120° IP20 930

#### **Product code 14153**

Brand REVAL BULB Supply voltage 24V Output 10W Maximum output 10W/1m Luminous flux 1285lumens Luminaire's efficiency lm79 129W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 8.0mm Minimum length 71.4mm Length 1000.0mm Work environment indoor use Certificates CE, RoHS Warranty 5 years







### LED strip REVAL BULB 98LED 1m 24V 10W 1363lm 120° IP20 940

#### **Product code 15131**

Brand REVAL BULB Supply voltage 24V Output 10W Maximum output 10W/1m Luminous flux 1363lumens Luminaire's efficiency lm79 136W Correlated colour temperature pure white 4000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 8.0mm Minimum length 71.4mm Length 1000.0mm Work environment indoor use Certificates CE, RoHS Warranty 5 years







### LED strip REVAL BULB 98LED 1m 24V 10W 1363lm 120° IP20 950

#### **Product code 16536**

Brand REVAL BULB Supply voltage 24V Output 10W Maximum output 10W/1m Luminous flux 1363lumens Luminaire's efficiency lm79 136W Correlated colour temperature pure white 5000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 8.0mm Minimum length 70.0mm Length 1000.0mm Work environment indoor use Certificates CE, RoHS Warranty 5 years







### LED strip REVAL BULB 98LED 1m nano 24V 10W 1285lm 120° IP66 930

#### **Product code 16340**

**Brand REVAL BULB** Supply voltage 24V Output 10W Maximum output 10W/1m Luminous flux 1285lumens Luminaire's efficiency lm79 129W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP66 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 8.0mm Minimum length 71.4mm Length 1000.0mm Work environment indoor use Operation temperature -30 - +45°C Certificates CE, RoHS Warranty 5 years







### LED strip REVAL BULB 98LED 1m nano 24V 10W 1363lm 120° IP66 940

#### **Product code 16676**

**Brand REVAL BULB** Supply voltage 24V Output 10W Maximum output 10W/1m Luminous flux 1363lumens Luminaire's efficiency lm79 136W Correlated colour temperature pure white 4000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP66 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.4mm Width 8.0mm Minimum length 71.4mm Length 1000.0mm Work environment indoor use Operation temperature -30 - +45°C Certificates CE, RoHS Warranty 5 years





102/129 26.08.2025

## LED strip REVAL BULB 98LED 5m silicone 24V 10W 1100lm 120° IP67 930

#### **Product code 15227**

**Brand REVAL BULB** Supply voltage 24V Output 10W Maximum output 10W/1m Luminous flux 1100lumens Luminaire's efficiency Im79 110W Correlated colour temperature warm white 3000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 25000h Llmf tm21 L70B50 @25°C 50.000h Height 6.0mm Width 10.0mm Minimum length 71.4mm Length 5000.0mm Certificates CE, RoHS Warranty 5 years



Waterproof LED strip suitable for outdoor and indoor use. Also suitable for use in the sauna, but not higher than behind the backrest. The life of the LED is reduced if the strip is used in temperatures higher than 70 ° C. We sell by roll.

LED strip REVAL BULB COB 1m 24V 10W 1030lm 170° IP20 930



103/129 26.08.2025

#### **Product code 16772**

Brand REVAL BULB Supply voltage 24V Output 10W Maximum output 10W/1m Luminous flux 1030lumens Luminaire's efficiency Im79 103W Correlated colour temperature warm white 3000K Lens angle 170 Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 2.5mm Width 10.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years













### **LED strip REVAL BULB COB 1m 24V 10W 1140lm 170° IP20 940**

#### Product code 16769


**Brand REVAL BULB** Supply voltage 24V Output 10W Maximum output 10W/1m Luminous flux 1140lumens Luminaire's efficiency Im79 114W Correlated colour temperature pure white 4000K Lens angle 170 Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 2.5mm Width 10.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years













### LED strip REVAL BULB COB 1m 24V 10W 970lm 180° IP20 927

#### **Product code 18256**

**Brand REVAL BULB** Supply voltage 24V Output 10W Maximum output 10W/1m Luminous flux 970lumens Luminaire's efficiency Im79 97W Correlated colour temperature warm white 2700K Lens angle 180 Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 2.5mm Width 10.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years













### **LED strip REVAL BULB COB 1m 24V 15W 1418lm 170° IP20 927**

#### **Product code 16785**

**Brand REVAL BULB** Supply voltage 24V Output 15W Maximum output 15W/1m Luminous flux 1418lumens Luminaire's efficiency Im79 95W Correlated colour temperature warm white 2700K Lens angle 170 Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 2.5mm Width 10.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years













### **LED strip REVAL BULB COB 1m 24V 15W 1530lm 170° IP20 930**

#### Product code 16771

**Brand REVAL BULB** Supply voltage 24V Output 15W Maximum output 15W/1m Luminous flux 1530lumens Luminaire's efficiency Im79 102W Correlated colour temperature warm white 3000K Lens angle 170 Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 2.5mm Width 10.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years













### **LED strip REVAL BULB COB 1m 24V 15W 1675lm 170° IP20 965**

#### Product code 16831

**Brand REVAL BULB** Supply voltage 24V Output 15W Maximum output 15W/1m Luminous flux 1675lumens Luminaire's efficiency Im79 112W Correlated colour temperature cold white 6500K Lens angle 170 Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 2.5mm Width 10.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years













### LED strip REVAL BULB COB 1m 24V 15W 1700lm 170° IP20 940

#### **Product code 16770**

**Brand REVAL BULB** Supply voltage 24V Output 15W Maximum output 15W/1m Luminous flux 1700lumens Luminaire's efficiency Im79 113W Correlated colour temperature pure white 4000K Lens angle 170 Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 2.5mm Width 10.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years

The LEDs are indistinguishable, the light is a continuous line - No direct need for a profile cover! This IP20 rated LED strip is perfect for creating a cozy atmosphere in dry indoor spaces. The LED strip has a very high color rendering quality (CRI90), ensuring the light beam does not distort the true colors in the room. Easy to install even for first-time users! The specified price is per meter of the strip. The total roll is 5 meters, which we can cut according to the customer's needs. Feel confident in our products as we sell hundreds of meters of LED strips every day! Send us an inquiry, and we'll make you an offer!













### LED strip REVAL BULB COB 1m 24V 5W 520lm 170° IP20 930

#### **Product code 17405**

Brand REVAL BULB Supply voltage 24V Output 5W Maximum output 5W/1m Luminous flux 520lumens Luminaire's efficiency Im79 104W Correlated colour temperature warm white 3000K Lens angle 170 Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 2.5mm Width 10.0mm Minimum length 50.0mm Length 1000.0mm In package 1m Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years

The LEDs are indistinguishable, the light is a continuous line - No direct need for a profile cover! This IP20 rated LED strip is perfect for creating a cozy atmosphere in dry indoor spaces. The LED strip has a very high color rendering quality (CRI90), ensuring the light beam does not distort the true colors in the room. Easy to install even for first-time users! The specified price is per meter of the strip. The total roll is 5 meters, which we can cut according to the customer's needs. Feel confident in our products as we sell hundreds of meters of LED strips every day! Send us an inquiry, and we'll make you an offer!













## LED strip REVAL BULB COB 400LED Slim 1m 24V 4.8W 480lm 180° IP20 930

#### **Product code 17652**

Brand REVAL BULB Supply voltage 24V Output 4.8W Maximum output 4.8W/1m Luminous flux 480lumens Luminaire's efficiency Im79 100W Correlated colour temperature warm white 3000K Lens angle 180 Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 1.5mm Width 3.0mm Minimum length 20.0mm Length 1000.0mm Work environment indoor use Operation temperature -20° - +45°C Certificates UL, CE Warranty 5 years

Slim REVAL BULB LED strip, which is easy to install even for first-time users! The strip has a self-adhesive back, which makes installation particularly convenient. This LED strip, with an IP20 protection class, is suitable for creating a cozy atmosphere in dry indoor spaces. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!







### LED strip REVAL BULB COB 400LED Slim 1m 24V 4.8W 480lm 180° IP20 940

#### **Product code 18221**

**Brand REVAL BULB** Supply voltage 24V Output 4.8W Maximum output 4.8W/1m Luminous flux 480lumens Luminaire's efficiency Im79 100W Correlated colour temperature pure white 4000K Lens angle 180 Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 1.5mm Width 3.0mm Minimum length 20.0mm Length 1000.0mm Work environment indoor use Operation temperature -20° - +45°C Certificates UL, CE Warranty 5 years

Slim REVAL BULB LED strip, which is easy to install even for first-time users! The strip has a self-adhesive back, which makes installation particularly convenient. This LED strip, with an IP20 protection class, is suitable for creating a cozy atmosphere in dry indoor spaces. Improve the quality of light in your everyday life and choose a top-notch lighting solution from the LED house product range!







## LED strip REVAL BULB COB 480LED 20m silicone sauna 48V 10W 900lm 180° IP67 930

#### **Product code 18316**

Brand REVAL BULB Supply voltage 48V Output 10W Maximum output 10W/1m Luminous flux 900lumens Luminaire's efficiency Im79 90W Correlated colour temperature warm white 3000K Lens angle 180 Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 5.2mm Width 10.0mm Minimum length 50.0mm Length 20000.0mm Work environment indoor / outdoor use Operation temperature -20° - +103°C Certificates CE

Waterproof LED strip, which can also be used in high sauna temperatures! The LED strip withstands temperatures up to 103 degrees Celsius. The LED strip is encased in silicone, which protects it from external conditions. We sell this product in 5-meter rolls. You can trust our products, as we sell hundreds of meters of LED strips every day! Send us an inquiry, and we'll make you an offer!

Warranty 5 years







# LED strip REVAL BULB COB 480LED 5m silicone sauna 24V 10W 900lm 180° IP67 930

#### Product code 17651

Brand REVAL BULB Supply voltage 24V Output 10W Maximum output 10W/1m Luminous flux 900lumens Luminaire's efficiency Im79 90W Correlated colour temperature warm white 3000K Lens angle 180 Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Height 5.2mm Width 10.0mm Minimum length 50.0mm Length 5000.0mm Work environment indoor / outdoor Operation temperature -20° - +103°C Certificates CE Warranty 5 years

Waterproof LED strip, which can also be used in high sauna temperatures! The LED strip withstands temperatures up to 103 degrees Celsius. The LED strip is encased in silicone, which protects it from external conditions. We sell this product in 5-meter rolls. You can trust our products, as we sell hundreds of meters of LED strips every day! Send us an inquiry, and we'll make you an offer!







## LED strip REVAL BULB COB 528LED/m 1m 24V 13W 1100lm 180° IP65 930

#### **Product code 17517**

**Brand REVAL BULB** Supply voltage 24V Output 13W Maximum output 13W/1m Luminous flux 1100lumens Luminaire's efficiency Im79 85W Correlated colour temperature warm white 3000K Lens angle 180 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP65 Lifespan 50000h Height 2.2mm Width 8.0mm Length 1000.0mm Work environment indoor use Certificates CE, RoHS Warranty 5 years

COB LED strip for different indoor spaces. The LEDs on the strip are not distinguishable, light appears as a uniform line. Therefore there is no direct need for profile covers! This COB strip can be cut at any interval and is easy to install even for firsttime users! For quick installation, the strip has an adhesive 3M tape on the back. The color rendering index (CRI90) of the LED strip is very high, ensuring highly accurate color rendering in the room. The specified price is for 1 meter of the strip. You can trust our products, as we sell hundreds of meters of LED strips every day! Send us an inquiry, and we will make you an offer!











### LED strip REVAL BULB COB 528LED/m 1m 24V 13W 1100lm 180° IP65 940

#### **Product code 17518**

**Brand REVAL BULB** Supply voltage 24V Output 13W Maximum output 13W/1m Luminous flux 1100lumens Luminaire's efficiency Im79 85W Correlated colour temperature pure white 4000K Lens angle 180 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP65 Lifespan 50000h Height 2.2mm Width 8.0mm Length 1000.0mm Work environment indoor use Certificates CE, RoHS Warranty 5 years

COB LED strip for different indoor spaces. The LEDs on the strip are not distinguishable, light appears as a uniform line. Therefore there is no direct need for profile covers! This COB strip can be cut at any interval and is easy to install even for firsttime users! For quick installation, the strip has an adhesive 3M tape on the back. The color rendering index (CRI90) of the LED strip is very high, ensuring highly accurate color rendering in the room. The specified price is for 1 meter of the strip. You can trust our products, as we sell hundreds of meters of LED strips every day! Send us an inquiry, and we will make you an offer!











### LED strip REVAL BULB COB 5m in silicone 24V 10W 1030lm 170° IP67 930

#### **Product code 16774**

**Brand REVAL BULB** Supply voltage 24V Output 10W Maximum output 10W/1m Luminous flux 1030lumens Luminaire's efficiency Im79 103W Correlated colour temperature warm white 3000K Lens angle 170 Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 2.5mm Width 12.0mm Minimum length 50.0mm Length 5000.0mm Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years








### LED strip REVAL BULB COB 5m in silicone 24V 10W 1125lm 180° IP67 965

#### **Product code 17613**

**Brand REVAL BULB** Supply voltage 24V Output 10W Maximum output 10W/1m Luminous flux 1125lumens Luminaire's efficiency Im79 113W Correlated colour temperature cold white 6500K Lens angle 180 Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 2.5mm Width 10.0mm Minimum length 50.0mm Length 5000.0mm Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years








### LED strip REVAL BULB COB 5m in silicone 24V 10W 1140lm 170° IP67 940

#### **Product code 16773**

**Brand REVAL BULB** Supply voltage 24V Output 10W Maximum output 10W/1m Luminous flux 1140lumens Luminaire's efficiency Im79 114W Correlated colour temperature pure white 4000K Lens angle 170 Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 2.5mm Width 12.0mm Minimum length 50.0mm Length 5000.0mm Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years








### LED strip REVAL BULB COB 5m in silicone 24V 10W 900lm 180° IP67 927

#### **Product code 17764**

**Brand REVAL BULB** Supply voltage 24V Output 10W Maximum output 10W/1m Luminous flux 900lumens Luminaire's efficiency Im79 90W Correlated colour temperature warm white 2700K Lens angle 180 Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 5.2mm Width 10.0mm Minimum length 50.0mm Length 5000.0mm Work environment indoor use Operation temperature -20 ~ 45°C Certificates CE Warranty 5 years








### LED strip REVAL BULB COB 5m in silicone 24V 15W 1100lm 180° IP67 940

#### **Product code 17879**

**Brand REVAL BULB** Supply voltage 24V Output 15W Maximum output 15W/1m Luminous flux 1100lumens Luminaire's efficiency Im79 73W Correlated colour temperature pure white 4000K Lens angle 180 Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 5.2mm Width 10.0mm Minimum length 41.4mm Length 5000.0mm Work environment indoor / outdoor use Operation temperature -20° - +45°C Certificates CE Warranty 5 years








### LED strip REVAL BULB COB 5m in silicone 24V 15W 1500lm 180° IP67 930

#### **Product code 17773**

**Brand REVAL BULB** Supply voltage 24V Output 15W Maximum output 15W/1m Luminous flux 1500lumens Luminaire's efficiency Im79 100W Correlated colour temperature warm white 3000K Lens angle 180 Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 5.2mm Width 10.0mm Minimum length 41.4mm Length 5000.0mm Work environment indoor / outdoor use Operation temperature -20° - +45°C Certificates CE Warranty 5 years








### LED strip REVAL BULB COB 5m in silicone 24V 4.8W 470lm 180° IP67 927

#### **Product code 17745**

**Brand REVAL BULB** Supply voltage 24V Output 4.8W Maximum output 4.8W/1m Luminous flux 470lumens Luminaire's efficiency Im79 98W Correlated colour temperature warm white 2700K Lens angle 180 Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L80B10 @25°C 50.000h Height 5.2mm Width 10.0mm Minimum length 20.0mm Length 5000.0mm Work environment indoor / outdoor use Operation temperature -20° - +45°C Certificates CE Warranty 5 years








## LED strip REVAL BULB COB 5m silicone 24V 10W 1000lm 180° IP67 930

#### **Product code 17749**

**Brand REVAL BULB** Supply voltage 24V Output 10W Maximum output 10W/1m Luminous flux 1000lumens Luminaire's efficiency Im79 100W Correlated colour temperature warm white 3000K Lens angle 180 Cri 90 Sdcm - macadam ellipses 3 Protection class IP67 Lifespan 50000h Llmf tm21 L70B50 @25°C 50.000h Height 5.2mm Width 10.0mm Minimum length 50.0mm Length 5000.0mm Work environment indoor / outdoor use Operation temperature -20° - +103°C Certificates CE Warranty 5 years








# LED strip REVAL BULB COB 608LED 1m 24V 16W 2100lm CRI90 180° IP20 2700K-6000K warm + cold white

#### **Product code 17650**

**Brand REVAL BULB** Supply voltage 24V Output 16W Maximum output 16W/1m Luminous flux 2100lumens Luminaire's efficiency Im79 131W Correlated colour temperature warm + cold white 2700K-6000K Lens angle 180 Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Height 2.2mm Width 10.0mm Minimum length 26.3mm Length 1000.0mm Work environment indoor use Operation temperature -20° - +45°C Certificates UL, CE Warranty 5 years



notch lighting solution from the LED

house product range!







### LED strip REVAL BULB COB RGB 840LED 1m 24V 16W 700lm 120° IP20 RGB

#### **Product code 17342**

**Brand REVAL BULB** Supply voltage 24V Output 16W Maximum output 16W/1m Luminous flux 700lumens Luminaire's efficiency Im79 44W Correlated colour temperature RGB **RGB** Lens angle 120 Source of light SANAN LED Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Height 2.5mm Width 10.0mm Minimum length 50.0mm Length 1000.0mm Work environment indoor use Certificates UL, CE Warranty 5 years

REVAL BULB LED strip, which is easy to install even for first-time users! The strip has a self-adhesive back, which makes installation particularly convenient. This LED strip, with an IP20 protection class, is suitable for creating a cozy atmosphere in dry indoor spaces. A popular choice in various lighting projects, including home and business environments, stages, performances, and other events. Improve the quality of light in your everyday life and choose a topnotch lighting solution from the LED house product range!









# LED strip REVAL BULB COB RGBW 840LED 1m 24V 16W 960lm CRI90 120° IP20 RGB+4000K RGBW pure white

#### **Product code 17344**

**Brand REVAL BULB** Supply voltage 24V Output 16W Maximum output 16W/1m Luminous flux 960lumens Luminaire's efficiency Im79 60W Correlated colour temperature RGBW pure white RGB+4000K Lens angle 120 Source of light SANAN LED Cri 90 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Height 2.5mm Width 10.0mm Minimum length 33.3mm Length 1000.0mm Work environment indoor use Certificates UL, CE Warranty 5 years

REVAL BULB LED strip, which is easy to install even for first-time users! The strip has a self-adhesive back, which makes installation particularly convenient. This LED strip, with an IP20 protection class, is suitable for creating a cozy atmosphere in dry indoor spaces. A popular choice in various lighting projects, including home and business environments, stages, performances, and other events. Improve the quality of light in your everyday life and choose a topnotch lighting solution from the LED house product range!









## LED strip REVAL BULB COB RGBW 840LED 1m 24V 18W 960lm 120° IP20 RGB + 6500K RGBW cold

#### Product code 17871

**Brand REVAL BULB** Supply voltage 24V Output 18W Maximum output 18W/1m Luminous flux 960lumens Luminaire's efficiency Im79 53W Correlated colour temperature RGBW cold RGB + 6500K Lens angle 120 Source of light SANAN LED Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Height 2.5mm Width 12.0mm Minimum length 33.3mm Length 1000.0mm Work environment indoor use Certificates UL, CE Warranty 5 years

REVAL BULB LED strip, which is easy to install even for first-time users! The strip has a self-adhesive back, which makes installation particularly convenient. This LED strip, with an IP20 protection class, is suitable for creating a cozy atmosphere in dry indoor spaces. A popular choice in various lighting projects, including home and business environments, stages, performances, and other events. Improve the quality of light in your everyday life and choose a topnotch lighting solution from the LED house product range!









### LED strip REVAL BULB UVC LED 1m 12leds/m 24V 6.7W 120° IP20 270-280nm UVC

#### **Product code 15614**

**Brand REVAL BULB** Supply voltage 24V Output 6.7W Maximum output 6.7W/1m Correlated colour temperature UVC 270-280nm Lens angle 120 Sdcm - macadam ellipses 3 Protection class IP20 Lifespan 50000h Llmf tm21 L70 @25°C 50.000h Minimum length 250.0mm Work environment indoor use Operation temperature -20 ° +45°C Certificates CE, RoHS Warranty 5 years

High-quality UVC <u>LED strip</u> for medical facilities, laboratories, water purification systems, and the food industry. UVC LED strips are used for disinfection and sterilization, and their radiation is effective in destroying microorganisms, bacteria, and viruses. The UVC radiation of the LED strip is potentially hazardous to humans and animals, and its use requires careful adherence to safety measures, including eye and skin protection. Do not look directly at the LED strip with the naked eye, and remove pets and houseplants from the room while the UV light is destroying bacteria! The specified price is per meter of the strip.

